

COPERNICUS SPACE COMPONENT SENTINEL OPTICAL IMAGING  
MISSION PERFORMANCE CLUSTER SERVICE

**Data Quality Report**

**Sentinel-2 MSI L2A**

**March 2023**

# OPT-MPC

Copernicus Sentinel



Optical Mission Performance Cluster

Ref.: OMPC.CS.DQR.002.02-2023

Issue: 59.0

Date: 09/03/2023

Contract: 4000136252/21/I-BG

|   |   |
|---|---|
| <b>Customer:</b> ESA                    | <b>Document Ref.:</b> OMPC.CS.DQR.002.02- |
| <b>Contract No.:</b> 4000136252/21/I-BG | <b>Date:</b> 09/03/2023                   |
|   | <b>Issue:</b> 59.0                        |

|                        |   |                      |  |
|------------------------|---|----------------------|--|
| <b>Project:</b>        | COPERNICUS SPACE COMPONENT SENTINEL OPTICAL IMAGING MISSION PERFORMANCE CLUSTER SERVICE |                      |  |
| <b>Title:</b>          | Data Quality Report - MSI L2A   |                      |  |
| <b>Author(s):</b>      | S2 MSI ESL team   |                      |  |
| <b>Approved by:</b>    | S. Enache, OPT-MPC MSI ESL Coordinator<br><br>S. Clerc, OPT-MPC Optical ESL Coordinator | <b>Authorized by</b> | F. Poustomis, OPT-MPC S2 Technical Manager |
| <b>Distribution:</b>   | ESA, published in Sentinel Online   |                      |  |
| <b>Accepted by ESA</b> | V. Boccia, ESA Deputy TO  |                      | S. Dransfeld, ESA TO                       |
| <b>Filename</b>        | OMPC.CS.DQR.002.02-2023 - i59r0 - MSI L2A DQR March 2023.docx                           |                      |  |

**Disclaimer**

The views expressed herein can in no way be taken to reflect the official opinion of the European Space Agency or the European Union.





## Table of content

|   |           |
|---|-----------|
| <b>1. INTRODUCTION .....</b>  | <b>6</b>  |
| 1.1 SCOPE OF THE DOCUMENT .....   | 6         |
| 1.2 MAIN POINTS FOR THIS MONTH .....                                      | 6         |
| <b>2. PROCESSING BASELINE STATUS .....</b>                                | <b>7</b>  |
| 2.1 PROCESSING BASELINE DESCRIPTION .....                                 | 7         |
| 2.2 CONFIGURATION AND DIFFERENCES WITH SEN2COR ‘USER’ VERSION .....       | 8         |
| <b>3. MEASURED PRODUCT PERFORMANCES .....</b>                             | <b>9</b>  |
| 3.1 PERFORMANCES OVERVIEW .....   | 9         |
| 3.2 PERFORMANCES .....  | 10        |
| 3.2.1 <i>Surface reflectance radiometry</i> .....                         | 10        |
| 3.2.2 <i>Water Vapour accuracy</i> .....                                  | 12        |
| 3.2.3 <i>Aerosol Optical Thickness</i> .....                              | 13        |
| 3.2.4 <i>Classification accuracy</i> .....                                | 14        |
| <b>4. PRODUCT FEATURES .....</b>  | <b>18</b> |
| <b>5. PRODUCT ANOMALIES .....</b>   | <b>19</b> |
| 5.1 INTRODUCTION .....  | 19        |
| 5.2 VERY LOW NEGATIVE REFLECTANCES NEAR THE EDGE OF THE SWATH (#81) ..... | 19        |
| <b>6. GENERAL INFORMATION ON PRODUCTS .....</b>                           | <b>21</b> |
| 6.1 INSIGHTS INTO THE COPERNICUS COLLECTION-1 .....                       | 21        |
| 6.2 PRODUCT FORMAT .....  | 22        |
| 6.3 OFF-LINE PRODUCTS .....   | 22        |
| 6.4 REPROCESSED PRODUCTS .....  | 22        |

## List of Figures

Figure 1: Correlation plot of SR retrieval by Sen2Cor over reference measurements on ground. ----- 11

Figure 2: Average SR retrieval performance per band estimated by comparison with ground measurements. B01 and B12 are shown with empty bars because they result from 4 campaign sample days only. There are no measurements from LaCrau and Gobabeb for B01 and B12. ----- 11

Figure 3: Correlation plots of Sen2Cor 2.10 (PBL 4.00) WV retrieval at 20 m resolution over WV reference from AERONET per climate zone on basis of a data set at 76 AERONET sites. The dashed line indicates  $x=y$  and the solid lines show the limits of uncertainty goal  $U(WV) \leq (0.1 * WV_{ref} + 0.2) \text{ g/cm}^2$ ----- 13

Figure 4: Correlation plot of Sen2Cor  $AOT_{550}$  retrieval at 20 m resolution over  $AOT_{550}$  reference from AERONET per climate zone on basis of a data set at 76 AERONET sites. Green triangles are  $AOT_{550}$  retrieved with the DDV-algorithm and orange triangles are  $AOT_{550}$  resulting from using CAMS data as fall-back solution. The dashed grey line indicates  $x=y$  and the solid grey lines show the limits of uncertainty goal  $U(AOT_{550}) \leq 0.1 * AOT_{550ref} + 0.03$ . ----- 14

Figure 5 : Illustration of the very low negative reflectances near the edge of the swath observed on the L2A product: S2B\_MSIL2A\_20220329T105629\_N0400\_R094\_T30SXJ\_20220329T134242.----- 20

## List of Tables

Table 3-1: Summary of Sentinel-2 L2A products measured performances for mission key requirements. 9


Table 3-2 : Test data selection: AERONET data (level  $\geq 1.5$ ) available within  $\pm 15$  min to overpass time.- 12

Table 3-3: Selected test sites for Sen2Cor 2.10 validation----- 15

Table 3-4: Summary of the cloud masking validation results for 4 study areas already analysed. True values are in columns and predicted values are in rows. ----- 15

Table 3-5: Summary of the cloud masking validation results for snow covered products. True values are in columns and predicted values are in rows. ----- 17

Table 5-1: Anomaly and processing baseline summary. ----- 19

|   |  |   |
|---|--|---|
|  | <b>Optical MPC</b><br><b>Data Quality Report – Sentinel-2 MSI L2A</b><br><b>March 2023</b> | Ref.: OMPC.CS.DQR.002.02-2023<br>Issue: 59.0<br>Date: 09/03/2023<br>Page: 6 |
|---|--|---|

# 1. Introduction

## 1.1 Scope of the Document

---

This document provides the status of Sentinel-2 mission Level 2A products data quality. It refers to systematic production from processing baselines 02.07 and higher and complements the Data Quality Report for L1C products.

Please note that the data quality status before the beginning of 2023 is covered by the Annual Performance Report of 2022. Please refer to this document as well as former Data Quality Reports (DQR) if needed.

It documents the measured product performances, the status of Level 2A processing chain, and the list of known anomalies on the production.

Additional performance metrics (in particular geometry) are reported in the companion Level 1C Data Quality Report. Similarly, anomalies affecting L1C products documented in that report also impact L2A products.

Note that a reference article provides an in-depth presentation of Sentinel-2 Calibration and Validation methods and results after one year in operation (F. Gascon *et al.*, "[Copernicus Sentinel-2 Calibration and Products Validation Status](#)", RSE, 2017). More information about L2A performance validation can be found in G. Doxani *et al.*, "[Atmospheric Correction Inter-Comparison Exercise](#)", Remote Sensing, 10 (352), pp 1-18. DOI: doi:10.3390/rs10020352 ISSN 2072-4292. Please note that a former version of Sen2Cor was used during this inter-comparison exercise and performance have generally improved since then. Detailed inter-comparison of cloud masking of Sen2Cor with other processors is published in S. Skakun *et al.*, "[Cloud Mask Intercomparison eXercise \(CMIX\): An evaluation of cloud masking algorithms for Landsat 8 and Sentinel-2](#)", Remote Sensing of Environment, Volume 274, 2022, 112990, ISSN 0034-4257<sup>1</sup>.


## 1.2 Main points for this month

---

- ❖ Release of the Sentinel 2 Annual Performance Report,
- ❖ Availability of the Copernicus Sentinel-2 Collection-1 data (see section 6.1),
- ❖ New quantitative assessment of Water Vapour and Aerosol Optical Thickness retrieval uncertainty (see sections 3.2.2 and 3.2.3),
- ❖ New results of classification accuracy analysis for non-snow-covered Sen2Cor 2.10 SCL products (see section 3.2.4).

---

<sup>1</sup> <https://doi.org/10.1016/j.rse.2022.112990>

|   |   |  |
|---|---|--|
|  | <p><b>Optical MPC</b></p> <p><b>Data Quality Report – Sentinel-2 MSI L2A</b></p> <p><b>March 2023</b></p> | <p>Ref.: OMPC.CS.DQR.002.02-2023</p> <p>Issue: 59.0</p> <p>Date: 09/03/2023</p> <p>Page: 7</p> |
|---|---|--|

## 2. Processing Baseline Status

### 2.1 Processing baseline description

On December 6<sup>th</sup>, 2022, the **processing baseline 05.09** was deployed. The format of the L1C and L2A products within this new PB remains the same as outlined in the current Product Specification Document (version 14.9).

The operational processor deployed for this processing baseline (version 6.1) is the same used to generate the Copernicus Sentinel-2 Collection-1 (for more details please refer to the section 6.1). The particularity of the current processor is that it can operate with both the Copernicus DEM at 90 meters ground spatial resolution, and/or with its finer defined version at 30 meters resolution. Currently, the 90 m version of the DEM will continue being used for the nominal productions while the 30 m version of the DEM is being used for the historical archive reprocessing.

The Processing Baseline identifier 05.09 tags the operational products generated with the 90 m version of the Copernicus DEM. The Processing Baseline identifier 05.00 tags the Copernicus Sentinel-2 Collection-1 products.

At Level-2A, the following evolutions are included:

- ❖ Identification of defective pixels from missing instrument source packets in L2A Scene Classification layer.
- ❖ Correction of anomalies #5, #65, #66 and #74 (please refer to <https://s2anomalies.acri.fr/anomalies> for more details).

In addition to the evolutions included in the processing baseline 05.09, we remind here that a **radiometric offset** on reflectance digital numbers has been introduced with processing baseline 04.00 deployed on January 25<sup>th</sup>, 2022. Then, the dynamic range is shifted by a band-dependent constant: BOA\_ADD\_OFFSET. This offset allows encoding negative surface reflectances that may occur over very dark surfaces. **From the user's point of view, the L2A Surface Reflectance (L2A\_SR) shall be retrieved from the output radiometry as follows:**

- ❖ Digital Number DN=0 remains the "NO\_DATA" value
- ❖ For a given DN in [1; 2<sup>15</sup>-1], the L2A BOA reflectance value is:

$$L2A\_SR_i = (L2A\_DN_i + BOA\_ADD\_OFFSET_i) / QUANTIFICATION\_VALUE_i$$

The radiometric offset value is reported in the field General\_Info/Product\_Image\_Characteristics/BOA\_ADD\_OFFSET\_VALUES\_LIST/BOA\_ADD\_OFFSET of the User Product Metadata, as well as in the field Image\_Data\_Info/Radiometric\_Info/BOA\_ADD\_OFFSET\_VALUES\_LIST/BOA\_ADD\_OFFSET of the Datastrip Metadata. It is set to -1000 Digital counts for all spectral bands.

For further information on the former processing baselines, please refer to <https://sentinels.copernicus.eu/web/sentinel/technical-guides/sentinel-2-msi/processing-baseline>.

## 2.2 Configuration and differences with Sen2cor ‘User’ version

The Level-2A operational processor generates, using algorithms of scene classification and atmospheric correction included in Sen2Cor processor, Level-2A (Surface Reflectance) products from Level-1C products. Level-2A can also be generated by the User from the Level-1C product using the standalone version of the Sen2Cor processor: <https://step.esa.int/main/snap-supported-plugins/sen2cor/>.

Sen2cor configuration applied for the Level-2A operational products:

- ❖ has Terrain correction activated,
- ❖ uses CCI AUX data to support scene classification.

Since Baseline 02.11, individual configuration parameters are set as follows and are the same default parameters provided with Sen2cor standalone version:

| Log_Level              | INFO   |
|------------------------|--|
| DEM                    | Copernicus DEM at 90 m since baseline03.00<br>Planet-DEM 90 m for previous baselines |
| Generate_DEM_Output    | FALSE  |
| Generate_TCI_Output    | TRUE   |
| Generate_DDV_Output    | FALSE  |
| Downsample_20_to_60    | TRUE   |
| Aerosol_Type           | RURAL  |
| Mid_Latitude           | SUMMER   |
| Ozone_Content          | get the best approximation from metadata   |
| WV_Correction          | 1: only 940 nm bands   |
| VIS_Update_Mode        | 1: variable visibility   |
| WV_Watermask           | 1: land-average  |
| Cirrus_Correction      | FALSE  |
| DEM_Terrain_Correction | TRUE   |
| BRDF_Correction        | 0: no BRDF correction  |
| Adj_Km                 | 1.000  |
| Visibility km          | 40.0   |
| Smooth_WV_Map          | 100.0  |
| WV_Threshold_Cirrus    | 0.25   |

Some differences can be found between L2A products generated by users with current Sen2cor version and the operational products generated using the baseline 02.11:

- ❖ If the Digital Elevation Model (DEM) is different, this can impact terrain correction results (users have access to SRTM-DEM and Copernicus DEM at 90 m and 30 m whereas L2A operational products uses Planet-DEM for baseline  $\geq$ 02.11 and Copernicus DEM at 90 m for baseline  $\geq$  03.00),
- ❖ The JP2000 compression library is different, which leads to a slightly different size of the products and a different compression noise.



### 3. Measured Product Performances

#### 3.1 Performances Overview


The following overview table provides a summary of the Level 2A products data quality performances. Note that the cloud masking performance and performances for water vapour and aerosol optical thickness reported in this issue of the L2A Data Quality Report have been assessed with Sen2cor versions 2.10 (operational processing, PBL 4.00), and may thus slightly differ from the performance of the current processing baseline. Surface reflectance performance is based on Sen2Cor 2.8.

**Table 3-1: Summary of Sentinel-2 L2A products measured performances for mission key requirements.**

| Requirement on                             | Description  | Measured performance   |
|--|--|--|
| <b>Surface reflectance</b>                 | Uncertainty goal of Bottom-of-Atmosphere reflectance retrieval:<br>$U(\rho) \leq 0.05\rho_{reference} + 0.005$ | 79% of retrieved SR values are within uncertainty goal   |
| <b>Water Vapour</b>                        | Uncertainty goal of WV retrieval:<br>$U(WV) \leq (0.1*WV_{ref}+0.2) \text{ g/cm}^2$                            | 96% of retrieved Water vapour values are within uncertainty goal   |
| <b>Aerosol Optical Thickness at 550 nm</b> | Uncertainty goal of AOT550 retrieval:<br>$U(AOT) \leq 0.1*AOT_{ref}+0.03$                                      | 48% (57%) of Aerosol optical thickness values at 550 nm retrieved with DDV algorithm (with CAMS data as fallback solution) are within uncertainty goal   |
| <b>Classification / Cloud masking</b>      | No requirement defined.  | Commission of clear pixels ranges from 0% to 8% depending on test site with the higher values mostly due to confusion with transparent clouds. It is 45% for snow covered winter-season products.<br><br>Balanced overall accuracies of clear vs cloud pixels range between 92 – 100% and is 77% for snow covered winter-season products |

Measured performances are detailed in the following sections.

Starting with Processing Baseline 04.00, Sentinel-2 L2A products are compliant with the CEOS-ARD requirements at the threshold level (see <https://ceos.org/ard/>).

|   |   |   |
|---|---|---|
|  | <p><b>Optical MPC</b></p> <p><b>Data Quality Report – Sentinel-2 MSI L2A</b></p> <p><b>March 2023</b></p> | <p>Ref.: OMPC.CS.DQR.002.02-2023</p> <p>Issue: 59.0</p> <p>Date: 09/03/2023</p> <p>Page: 10</p> |
|---|---|---|

## 3.2 Performances

### 3.2.1 Surface reflectance radiometry

New quantitative assessment of surface reflectance radiometric retrieval for Sen2Cor 2.8 was done relative to a limited number of surface reflectance reference measurements [B. Pflug, J. Louis, R. de los Reyes, K. Pflug, U. Mueller-Wilm, C. Quang, R.I. Iannone, and P. Reinartz. " [Evaluation of SEN2COR Surface Reflectance Products over land surface with reference measurements on Ground](#)," in 2022 IEEE International Geoscience and Remote Sensing Symposium, (IEEE International Symposium on Geoscience and Remote Sensing IGARSS, 2022, pp.]. Measurements at RadCalNet sites LaCrau and Gobabeb were provided by CNES and RadCalNet-teams and measurements over test sites in Germany were provided by DLR.

The data set used contains 40 sample days from October 2017 to May 2018 for RadCalNet site Gobabeb, 21 sample days from January to September 2018 for RadCalNet site LaCrau, and 4 sample days from May 2018 to October 2021 for different locations in North-Eastern Germany. Reference measurements from RadCalNet sites Gobabeb and LaCrau are reused from Atmospheric Correction Intercomparison eXercise ACIX-2 (G. Doxani *et al.*, "[Atmospheric Correction Inter-Comparison Exercise](#)", Remote Sensing, 10 (352), pp 1-18. DOI: doi:10.3390/rs10020352 ISSN 2072-4292). They were provided by CNES for Sentinel-2 bands B02 to B11 in the same angular conditions as Sentinel-2A & 2B observations over the sites.

The site Gobabeb is located in Namibia in a desert environment without vegetation. The site LaCrau is located in the south of France and has sparse vegetation cover. The test areas in Germany represent flat terrain containing meadows and soil in a vegetated environment. Note that this data set is still too small for providing statistically reliable information. It will be extended with availability of new reference measurements.

The quantitative assessment of surface reflectance radiometric performance is provided for Sen2Cor version 2.80 'user' processing with CAMS fall back.

The correlation plot of SR retrieval by Sen2Cor over reference measurements on ground (Figure 1) shows good performance of Sen2Cor SR retrieval for the investigated data set. Results look similar to equivalent plots in the literature. The total uncertainty of SR retrieval with Sen2Cor over all sites is about 0.02 respectively 9% and nearly 80% of SR retrievals are compliant with uncertainty goal  $\Delta SR \leq 0.05 * SR_{ref} + 0.005$ . Systematic uncertainty  $U_{sys}(SR) = (0.02 \pm 0.007) * SR + (0.0 \pm 0.002)$  is well within the uncertainty goal. Figure 2 gives deeper insight into SR retrieval performance by looking to average systematic uncertainties per band. Whereas random uncertainty is little increasing with band number respectively with SR values, we can observe much higher systematic uncertainty for B05 and B11. The origin for that is still not cleared. Current interpretation is that it may be caused by WV absorption which is present in both bands.

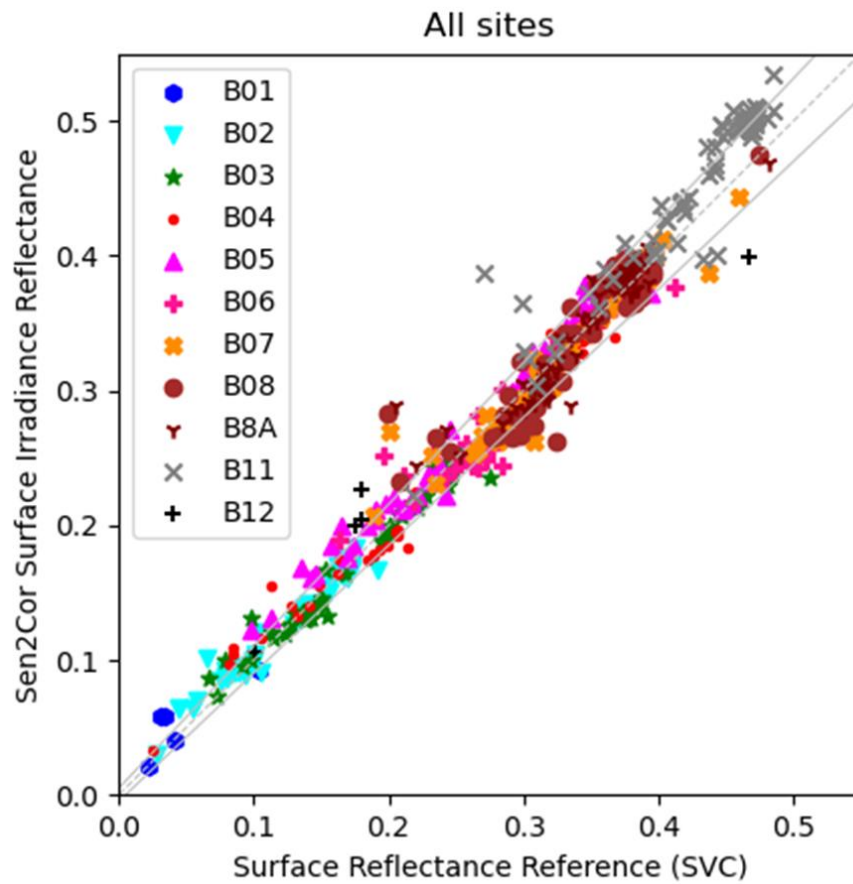


Figure 1: Correlation plot of SR retrieval by Sen2Cor over reference measurements on ground.

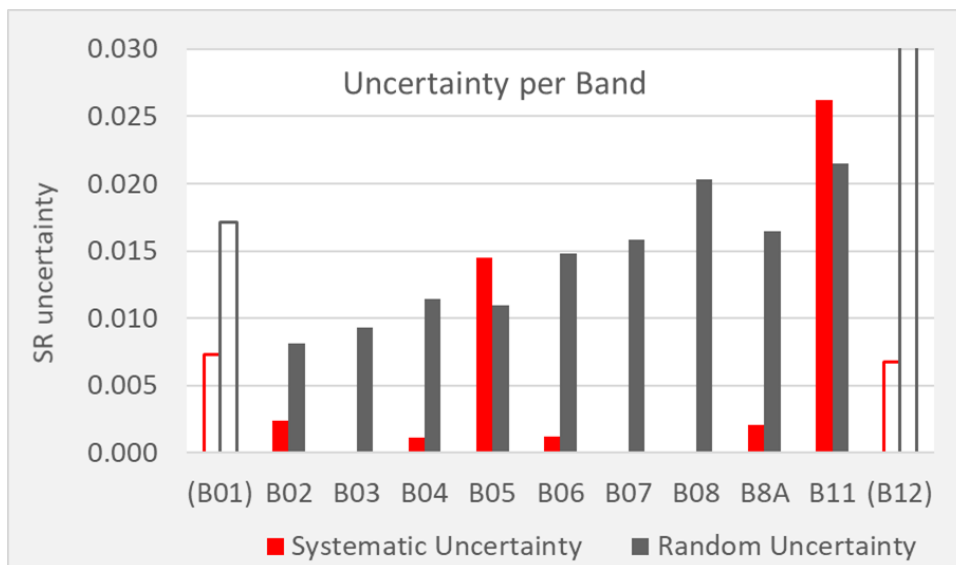


Figure 2: Average SR retrieval performance per band estimated by comparison with ground measurements. B01 and B12 are shown with empty bars because they result from 4 campaign sample days only. There are no measurements from LaCrau and Gobabeb for B01 and B12.


### 3.2.2 Water Vapour accuracy

Quantitative assessment of water vapour retrieval uncertainty is determined by direct comparison of Sen2Cor output averaged over 9 km x 9 km region of interest around Sun photometer location with ±15 min time average reference value from AERONET Sun photometer.

The analysis is based on a large dataset of 1989 match-ups in year 2022 at 76 AERONET locations distributed over all continents and all climate zones.

**Table 3-2 : Test data selection: AERONET data (level ≥ 1.5) available within ±15 min to overpass time. Number of tiles used for analysis per continent. Data selection oriented on data use (1/3 weight) and area of continent (2/3 weight).**


| climate zone          | N-America  | S- America | Europe     | Africa     | Asia       | Australia | No. of Sites | No. of Tiles |
|-----------------------|------------|------------|------------|------------|------------|-----------|--------------|--------------|
| <b>Polar</b>          | 72         |            | 154        |            |            |           | <b>7</b>     | 226          |
| <b>Temperate</b>      | 159        |            | 242        |            |            |           | <b>14</b>    | 401          |
| <b>Midlatitude N</b>  | 248        |            | 191        | 45         | 213        |           | <b>21</b>    | 697          |
| <b>Subtropical N</b>  | 85         |            |            | 101        | 116        |           | <b>13</b>    | 302          |
| <b>Tropical</b>       |            | 78         |            | 78         | 39         | 19        | <b>13</b>    | 214          |
| <b>Subtropical S</b>  |            | 9          |            | 61         |            | 11        | <b>5</b>     | 81           |
| <b>Midlatitude S</b>  |            | 23         |            | 0          |            | 34        | <b>4</b>     | 57           |
| <b>Aural</b>          |            | 11         |            |            |            |           | <b>1</b>     | 11           |
| number of Tiles       | <b>564</b> | <b>121</b> | <b>587</b> | <b>285</b> | <b>368</b> | <b>64</b> | <b>76</b>    | <b>1989</b>  |
| percentage of Tiles   | <b>28%</b> | <b>6%</b>  | <b>30%</b> | <b>14%</b> | <b>19%</b> | <b>3%</b> |              |              |
| 2/3 area + 1/3 access | 18%        | 9%         | 30%        | 15%        | 23%        | 5%        |              |              |
| data access           | 17%        | 0.4%       | 76%        | 0.1%       | 4%         | 3%        |              |              |
| area fraction         | 18%        | 13%        | 8%         | 22%        | 33%        | 6%        |              |              |

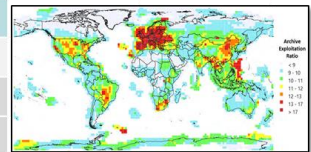

The correlation plots of WV retrieval by Sen2Cor 2.10 (PBL 4.00) over AERONET reference are shown in Figure 3.

Water vapour retrieval is very accurate up to really high WV content with 96% of retrievals within the uncertainty goal. Average WV retrieval uncertainty is 0.23 g/cm<sup>2</sup>. Validation shows a trend for little underestimation of WV by Sen2Cor confirmed by systematic part of the uncertainty:

$$U_{\text{sys}}(\text{WV}) = (-0.08 \pm 0.003) * \text{WV} + (0.01 \pm 0.006)$$

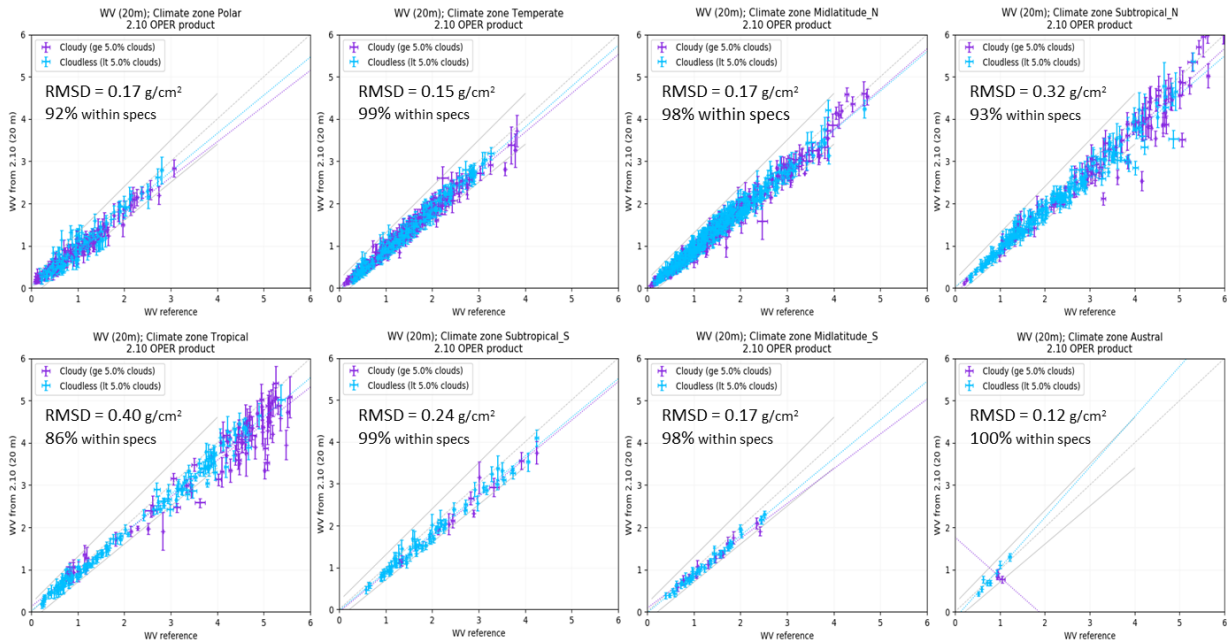


**Figure 3: Correlation plots of Sen2Cor 2.10 (PBL 4.00) WV retrieval at 20 m resolution over WV reference from AERONET per climate zone on basis of a data set at 76 AERONET sites. The dashed line indicates  $x=y$  and the solid lines show the limits of uncertainty goal  $U(WV) \leq (0.1 * WV_{ref} + 0.2) \text{ g/cm}^2$**

### 3.2.3 Aerosol Optical Thickness

Quantitative assessment of aerosol optical thickness retrieval uncertainty is determined by direct comparison of Sen2Cor output averaged over 9kmx9km region of interest around Sun photometer with  $\pm 15$  min time average reference value from AERONET Sun photometer. The analysis is based on a large dataset of 1989 match-ups in year 2022 at 76 AERONET locations distributed over all continents (see Figure 3 for more details).

The correlation plots of AOT retrieval by Sen2Cor 2.10 (PBL 4.00) over AERONET reference are shown in Figure 4. The data were processed with DDV algorithm respectively using AOT from the Copernicus Atmosphere Monitoring Service (CAMS) as fall back-solution for AOT-retrieval when there are less than 2% Dense Dark Vegetation (DDV) pixels in the image.

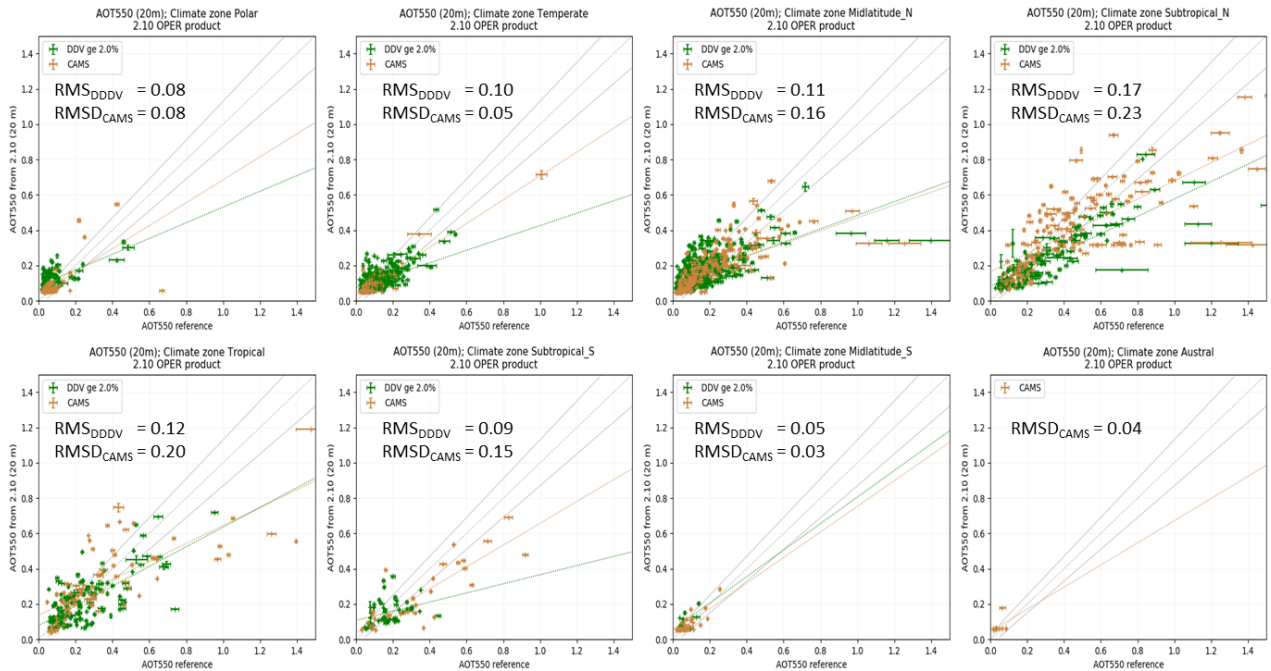

**Figure 4: Correlation plot of Sen2Cor AOT<sub>550</sub> retrieval at 20 m resolution over AOT<sub>550</sub> reference from AERONET per climate zone on basis of a data set at 76 AERONET sites. Green triangles are AOT<sub>550</sub> retrieved with the DDV-algorithm and orange triangles are AOT<sub>550</sub> resulting from using CAMS data as fall-back solution. The dashed grey line indicates  $x=y$  and the solid grey lines show the limits of uncertainty goal  $U(AOT_{550}) \leq 0.1 * AOT_{550ref} + 0.03$ .**

The AOT-retrieval algorithm implemented in Sen2Cor requires DDV-pixels in the image. If there are not enough DDV-pixels present, then the auxiliary CAMS files embedded in the L2A products are used as fall-back solution. Therefore, aerosol optical thickness retrieval results are analysed separately for the DDV algorithm and the CAMS-fall-back solution. The DDV algorithm gives 25% to 63% of values within uncertainty goal dependent on climate zone (average 48%) with average total uncertainty of 0.11. Validation shows a trend for underestimation of higher AOT by DDV algorithm implemented in Sen2Cor confirmed by systematic part of the uncertainty  $U_{sys}^{DDV}(AOT) = (-0.54 \pm 0.01) * AOT + (0.08 \pm 0.003)$ . CAMS fall-back solution mostly is activated in arid, non-vegetated regions or during winter time. It gives 34% to 80% of values within uncertainty goal dependent on climate zone (average 57%), however with larger average uncertainty of 0.16. This larger uncertainty results at least partly from the higher AOT-values present in situations when CAMS data are used. Systematic uncertainty  $U_{sys}^{CAMS}(AOT) = (-0.42 \pm 0.01) * AOT + (0.08 \pm 0.005)$  again shows a trend for AOT underestimation relative to AERONET at higher AOT values.

### 3.2.4 Classification accuracy

Classification performance is evaluated by comparison of the Sen2Cor outputs with reference samples. The reference samples were labelled visually based on the RGB and false-RGB composites, cirrus band layer, and the spectral profiles.

Current analysis of classification accuracy for Sen2Cor 2.10 SCL products were evaluated on a set of 10 Sentinel-2 L2A scenes at 4 test sites (Table 3-3) for non-snow covered products and on a set of 4 Sentinel-2 L2A scenes for test site Yakutsk with snow coverage. Results for snow covered products are reported separately.

**Table 3-3: Selected test sites for Sen2Cor 2.10 validation**

| Site                | Tile   | Date       | Cloud cover (%) | No data pixels (%) |
|---------------------|--------|------------|-----------------|--------------------|
| Potsdam (Germany)   | T33UUU | 22-03-2022 | 6.07            | 0.00               |
|                     |        | 04.08.2022 | 18.58           | 0.00               |
| Rimrock (USA)       | T11TMM | 24-04-2022 | 7.27            | 1.79               |
|                     |        | 16-09-2022 | 28.12           | 2.00               |
| Murcia (Spain)      | T30SXH | 15-05-22   | 24.01           | 0.00               |
|                     |        | 07-10-2022 | 11.00           | 0.00               |
| Bandung (Indonesia) | T48MZT | 10-06-22   | 26.48           | 6.48               |
|                     |        | 22-11-22   | 96              | 0.86               |
| Yakutsk (Russia)    | T52VEP | 10-02-2022 | 12.76           | 0.00               |
|                     |        | 28-07-22   | 12.84           | 0.00               |

Validation sites are distributed over several continents, covering different climate zones, and including various seasons, and environments.

**Table 3-4: Summary of the cloud masking validation results for 4 study areas already analysed. True values are in columns and predicted values are in rows.**

**Potsdam (T33UUU)**

|       | Clear      | Cloud      | sum         | UA  | CE  | OA                 |
|-------|------------|------------|-------------|-----|-----|--------------------|
| Clear | 76 %       | 2%         | <b>78%</b>  | 97% | 3%  | 91%                |
| Cloud | 7%         | 15%        | <b>22%</b>  | 69% | 31% |                    |
| sum   | <b>82%</b> | <b>18%</b> | <b>100%</b> |     |     |                    |
| PA    | 92%        | 87%        |             |     |     | <b>Balanced OA</b> |
| OE    | 8.4%       | 12.6%      |             |     |     | <b>94%</b>         |

**Rimrock (T11TMM)**

|       | Clear | Cloud | sum  | UA  | CE  | OA          |
|-------|-------|-------|------|-----|-----|-------------|
| Clear | 52 %  | 1%    | 54%  | 97% | 3%  | 92%         |
| Cloud | 6%    | 40%   | 46%  | 87% | 13% |             |
| sum   | 58%   | 42%   | 100% |     |     |             |
| PA    | 90%   | 96%   |      |     |     | Balanced OA |
| OE    | 10.3% | 3.5%  |      |     |     | 93%         |

**Murcia (T30SXH)**

|       | Clear | Cloud | sum  | UA  | CE  | OA          |
|-------|-------|-------|------|-----|-----|-------------|
| Clear | 52 %  | 5%    | 56%  | 92% | 8%  | 90%         |
| Cloud | 5%    | 39%   | 44%  | 89% | 11% |             |
| sum   | 56%   | 44%   | 100% |     |     |             |
| PA    | 91%   | 89%   |      |     |     | Balanced OA |
| OE    | 8.5%  | 10.8% |      |     |     | 92%         |

**Bandung (T48MZT)**

|       | Clear | Cloud | sum  | UA   | CE  | OA          |
|-------|-------|-------|------|------|-----|-------------|
| Clear | 42 %  | 0%    | 42%  | 100% | 0%  | 92%         |
| Cloud | 8%    | 50%   | 58%  | 87%  | 13% |             |
| sum   | 50%   | 50%   | 100% |      |     |             |
| PA    | 85%   | 100%  |      |      |     | Balanced OA |
| OE    | 15.4% | 0.2%  |      |      |     | 92%         |

**Yakutsk (T52VEP, summer – no snow cover)**

|       | Clear | Cloud | sum  | UA   | CE | OA          |
|-------|-------|-------|------|------|----|-------------|
| Clear | 75 %  | 0%    | 75%  | 100% | 0% | 100%        |
| Cloud | 0%    | 25%   | 25%  | 99%  | 1% |             |
| sum   | 75%   | 25%   | 100% |      |    |             |
| PA    | 100%  | 99%   |      |      |    | Balanced OA |
| OE    | 0.2%  | 0.7%  |      |      |    | 100%        |




The accuracy assessment for cloud masking per test site is presented in Table 3-4 for products without snow cover. Sen2Cor classes cloud medium probability, cloud high probability and thin cirrus are aggregated to clouds, whereas Sen2Cor classes water, vegetated, non-vegetated and snow are aggregated to clear pixels. Commission and omission errors correspond to user’s (UA) and producer’s (PA) accuracies respectively. Balanced overall accuracy (OA) is the average of omission (OE) and commission (CE) errors. Results show good cloud masking performance with balanced overall accuracies of clear vs cloud pixels ranging between 92-100%. In terms of commission errors of the clear pixel the range is between 0-8% with the lower values at sites Bandung and Yakutsk and the higher for Murcia which show also a 11% omission of clouds.

**Table 3-5: Summary of the cloud masking validation results for snow covered products. True values are in columns and predicted values are in rows.**

**Yakutsk (T52VEP, winter – with snow cover)**

|       | Clear      | Cloud      | sum         | UA  | CE  | OA                 |
|-------|------------|------------|-------------|-----|-----|--------------------|
| Clear | 45 %       | 36%        | <b>81%</b>  | 55% | 45% | 63%                |
| Cloud | 1%         | 18%        | <b>19%</b>  | 95% | 5%  |                    |
| sum   | <b>46%</b> | <b>54%</b> | <b>100%</b> |     |     |                    |
| PA    | 98%        | 33%        |             |     |     | <b>Balanced OA</b> |
| OE    | 1.9%       | 66.8%      |             |     |     | <b>77%</b>         |

The accuracy assessment for cloud masking on snow covered products (so far only test site Yakutsk) is presented in Table 3-5. Results show worse cloud masking performance compared to products without snow cover, with balanced overall accuracy of clear vs cloud pixels of 77%. Commission errors of the clear pixel is 45%. It is important to consider that labelling the snow-covered product is more challenging than products without snow cover, which leads to higher uncertainties in the labelled masking references. There are more (longer) shadows in winter due to the low sun elevation, which are difficult to recognize over bright snow surface.

|   |   |   |
|---|---|---|
|  | <p><b>Optical MPC</b></p> <p><b>Data Quality Report – Sentinel-2 MSI L2A</b></p> <p><b>March 2023</b></p> | <p>Ref.: OMPC.CS.DQR.002.02-2023</p> <p>Issue: 59.0</p> <p>Date: 09/03/2023</p> <p>Page: 18</p> |
|---|---|---|

## 4. Product features

Some known product features are visible on Sentinel 2 Level-2A products.

These features are generated by:

- ❖ the current scene classification algorithm which has some known limitations,
- ❖ the overlap area between adjacent tiles,
- ❖ terrain over-correction on shaded areas due to inaccuracies of the Digital Elevation Model,
- ❖ products with a Sun-Zenith Angle (SZA) higher than 70°,
- ❖ corrupted pixels affected by missing or degraded instrument source packets,
- ❖ discontinuities visible in Terrain Correction on very flat areas,
- ❖ artefacts at the edge of the swath due to L2A NoData mask.

Please refer to the Sentinel 2 Annual Performance Report covering the year 2022 for more details and examples of the known Sentinel 2 product features.

## 5. Product anomalies

### 5.1 Introduction

This section describes the L2A product anomalies that occurred in 2023. Please refer to the APR 2022 or to the on-line Sentinel-2 anomaly database <https://s2anomalies.acri.fr/anomalies> to have the full list of anomalies.

Note that some L1C anomalies affect also the quality of L2A products. Whenever this is the case, any reprocessing to correct an anomaly will include level 2 products.

Each anomaly is tagged with a code “#N” allowing linking it to a given processing baseline through the three tables provided in the sub-sections below.

The following table provides the status of known L2A processing anomalies. Note that some L1C anomalies directly affect the quality of the L2A products.

**Table 5-1: Anomaly and processing baseline summary.**


| Anomaly ID | Baseline number   | 05.09         |
|------------|---|---------------|
|            | Deployment date   | 06/12/2022    |
|            | Anomaly title   |               |
| 81         | Very low negative reflectances near the edge of the swath | Some products |

### 5.2 Very low negative reflectances near the edge of the swath (#81)


A new anomaly consisting in a dark area with very low negative reflectances near the edge of the swath was observed by the S2GM team on the product:

*S2B\_MSIL2A\_20220329T105629\_N0400\_R094\_T30SXJ\_20220329T134242.*

This anomaly is particularly visible on the B02 band. This radiometry “distortion” defect is not present in the L1C image. This defect is the result of an overcorrection of the adjacency correction algorithm for the case when the radiometry of the pixels near the swath border is noticeably different from the average radiometry of the scene. The blue bands are the spectral bands which are affected the most. An evolution is in preparation to improve the quality of the adjacency correction for the pixels near the swath border. Users are advised to pay particular attention to the swath border area for the cases mentioned above (very heterogeneous radiometry of the scene). The effect can be visible up to 1 km from the swath border. An evolution is in preparation to improve the quality of the adjacency correction for the pixels near the swath border for these particular cases.

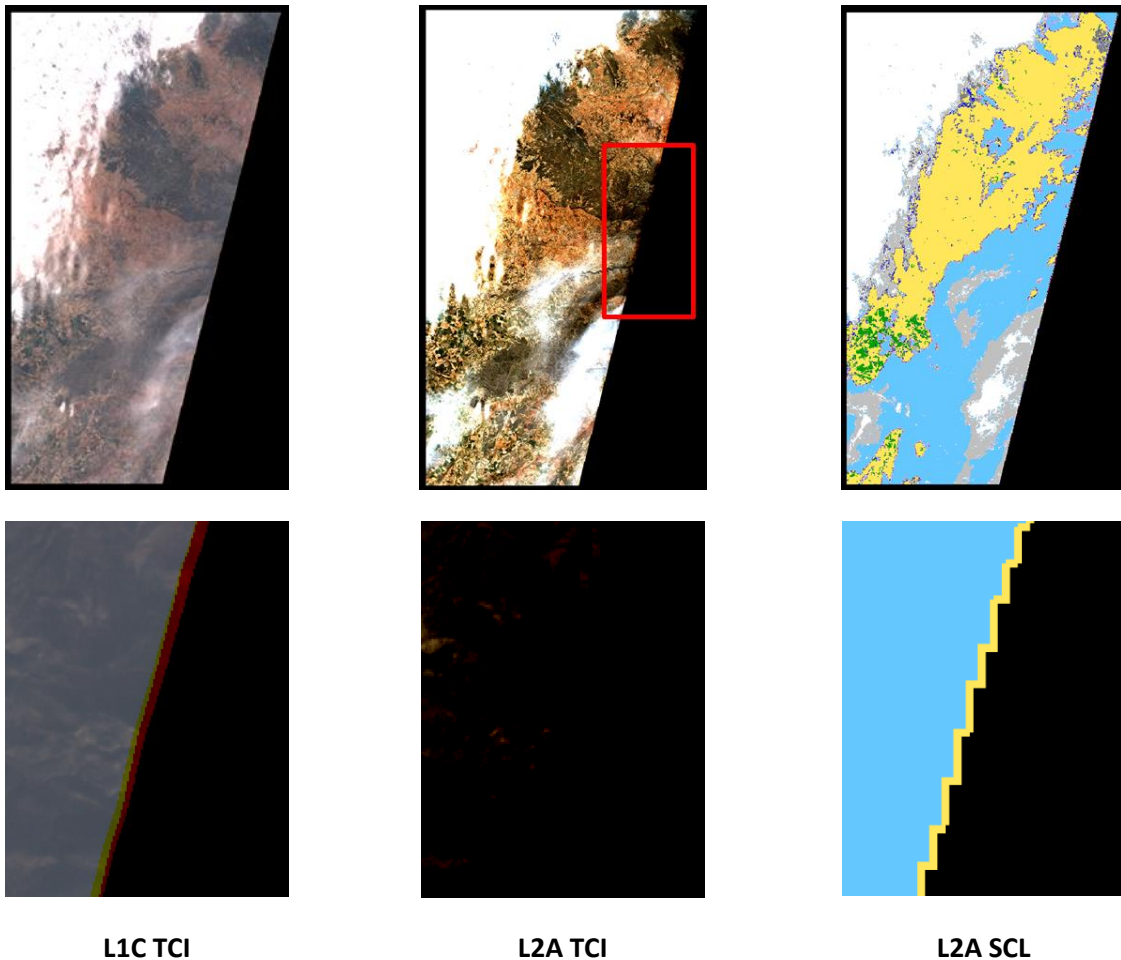

**Figure 5 : Illustration of the very low negative reflectances near the edge of the swath observed on the L2A product: S2B\_MSIL2A\_20220329T105629\_N0400\_R094\_T30SXJ\_20220329T134242. An illustration of the corresponding L1C product (first column) is also shown**

|   |   |   |
|---|---|---|
|  | <p><b>Optical MPC</b></p> <p><b>Data Quality Report – Sentinel-2 MSI L2A</b></p> <p><b>March 2023</b></p> | <p>Ref.: OMPC.CS.DQR.002.02-2023</p> <p>Issue: 59.0</p> <p>Date: 09/03/2023</p> <p>Page: 21</p> |
|---|---|---|

## 6. General information on products

### 6.1 Insights into the Copernicus Collection-1

The Collection-1 reprocessing will provide consistent Sentinel 2A and Sentinel 2B time series with a uniform processing baseline (PB 05.00) and optimized calibration.

The L2A surface reflectance product will be compliant with the CEOS Analysis Ready Data for Land (CARD4L) standard from 2015 to the present.

The improvements introduced in recent baselines will be generalized to the whole time series:

- ❖ Geometric refining using the high-quality Copernicus Digital Elevation Model (introduced in PB 03.00),
- ❖ Harmonized radiometry after alignment of S2B on S2A (introduced with PB 04.00),
- ❖ Most recent product format for L1C and L2A with radiometric offset, quality masks in raster format, L2A quality indicators, DOI (introduced in PB 04.00),
- ❖ Improved L2A processing algorithms for scene classification and surface reflectance (aligned with PB 04.00).

In addition, the PB 05.00 will provide some specific improvements over the current 04.00 baseline:


- ❖ Optimization of the applicability of successive radiometric and geometric calibrations,
- ❖ Reliable quality mask for radiometric saturation,
- ❖ Identification of defective pixels from missing instrument source packets in L2A Scene Classification layer,
- ❖ Use of the Copernicus Digital Elevation Model at 30 m resolution.

Collection-1 products are distributed via three different platforms:

- ❖ <https://creodias.eu>: the data catalogue is accessible at <https://finder.creodias.eu/>. To query only Collection-1 products, a filter on the sensing date (i.e. before January 2022 for Collection-1 products) and on the publication date can be used, as the dissemination of these products started in January 2023.
- ❖ <https://www.onda-dias.eu>: the data catalogue is accessible at <https://catalogue.onda-dias.eu/catalogue/>. To query only Collection-1 products (PB 05.00), you can write “\*\_N0500\_\*” in the research bar of the catalogue.
- ❖ <https://mundiwebservices.com>: [L1C Collection-1 products can be found at https://mundiwebservices.com/geodata/S2R\\_MSI\\_L1C](https://mundiwebservices.com/geodata/S2R_MSI_L1C), and [L2A Collection-1 products at https://mundiwebservices.com/geodata/S2R\\_MSI\\_L2A](https://mundiwebservices.com/geodata/S2R_MSI_L2A).

In February 2023, Collection-1 products of September to December 2021 are available. The dissemination of older products is ongoing.

Additional information regarding the status and accessibility of Collection 1 reprocessed data can be found on: <https://sentinels.copernicus.eu/web/sentinel/technical-guides/sentinel-2-msi/copernicus-sentinel-2-collection-1-availability-status>.

|   |  |  |
|---|--|--|
|  | <b>Optical MPC</b><br><b>Data Quality Report – Sentinel-2 MSI L2A</b><br><b>March 2023</b> | Ref.: OMPC.CS.DQR.002.02-2023<br>Issue: 59.0<br>Date: 09/03/2023<br>Page: 22 |
|---|--|--|

## 6.2 Product Format

---

On December 6<sup>th</sup> 2016, a new naming convention has been introduced (Product Specification Document version 14). The new convention leads to shorter product paths with less redundancy of information. The product name now includes the acquisition date and a “product discriminator” which is related to the acquisition date but can be different in some instances.

A reformatting of the Data Hub product archive to the single-tile, short name format is currently in progress. The JP2000 images are not affected by the reformatting.

Note that the product footprint for all products generated before July 20<sup>th</sup> 2016 include areas of No Data, while for the later product the footprint outlines valid pixels only.

## 6.3 Off-line products

---

Beginning 23<sup>rd</sup> September 2019, Sentinel-2 products older than one year will not be available on-line in the Copernicus data hubs. Instead, they will be retrieved on demand from the Long-Term Archive (LTA). Products retrieved from the LTA will be different from the original ones delivered in Near Real Time production:

- ❖ The product discriminator (the second date in the product) will be different. However, the zip file provided with the delivery will keep the name of the original product.
- ❖ The product will be restored using the latest applicable format (currently compact, single tile format, PSD v14.2).
- ❖ The GENERATION\_TIME field in the User Product metadata will also reflect the date of the retrieval from the LTA.

See <https://scihub.copernicus.eu/userguide/LongTermArchive> for more details.

## 6.4 Reprocessed products

---

Two situations can lead to a recovery reprocessing and update of the SciHub archive:

- ❖ Products affected by major anomalies tracked in the Sentinel-2 anomaly database
- ❖ Datastrips with missing L1C tiles. In this case the products are not tracked in the anomaly database.

In both cases, the original products are removed and replaced by products with a more recent generation time. However, in the latter case, the original products can still be considered as valid.

***End of document***