

COPERNICUS SPACE COMPONENT SENTINEL OPTICAL IMAGING
MISSION PERFORMANCE CLUSTER SERVICE

Data Quality Report

Sentinel-2 MSI L2A

May 2023

OPT-MPC

Copernicus Sentinel



Optical Mission Performance Cluster

Ref.: OMPC.CS.DQR.002.04-2023

Issue: 61.0

Date: 11/05/2023

Contract: 4000136252/21/I-BG

Customer: ESA	Document Ref.: OMPC.CS.DQR.002.04-
Contract No.: 4000136252/21/I-BG	Date: 11/05/2023
	Issue: 61.0

Project:	COPERNICUS SPACE COMPONENT SENTINEL OPTICAL IMAGING MISSION PERFORMANCE CLUSTER SERVICE		
Title:	Data Quality Report - MSI L2A		
Author(s):	S2 MSI ESL team		
Approved by:	S. Enache, OPT-MPC MSI ESL Coordinator S. Clerc, OPT-MPC Optical ESL Coordinator	Authorized by	F. Poustomis, OPT-MPC S2 Technical Manager
Distribution:	ESA, published in Sentinel Online		
Accepted by ESA	V. Boccia, ESA Deputy TO		S. Dransfeld, ESA TO
Filename	OMPC.CS.DQR.002.04-2023 - i61r0 - MSI L2A DQR May 2023.docx		

Disclaimer

The views expressed herein can in no way be taken to reflect the official opinion of the European Space Agency or the European Union.



Table of content

1. INTRODUCTION	1
1.1 SCOPE OF THE DOCUMENT	1
1.2 MAIN POINTS FOR THIS MONTH	1
2. PROCESSING BASELINE STATUS	2
2.1 PROCESSING BASELINE DESCRIPTION	2
2.2 CONFIGURATION AND DIFFERENCES WITH SEN2COR ‘USER’ VERSION	3
3. MEASURED PRODUCT PERFORMANCES	4
3.1 PERFORMANCES OVERVIEW	4
3.2 PERFORMANCES	5
3.2.1 <i>Surface reflectance radiometry</i>	5
3.2.2 <i>Water Vapour accuracy</i>	7
3.2.3 <i>Aerosol Optical Thickness</i>	8
3.2.4 <i>Classification accuracy</i>	9
4. AUXILIARY DATA MONITORING	14
4.1 MATERIAL AND METHODS	14
4.2 AEROSOL OPTICAL DEPTH AT 550 NM	15
4.3 TOTAL COLUMN OF WATER	16
5. PRODUCT FEATURES	19
6. PRODUCT ANOMALIES	20
6.1 INTRODUCTION	20
6.2 VERY LOW NEGATIVE REFLECTANCES NEAR THE EDGE OF THE SWATH (#81)	20
7. GENERAL INFORMATION ON PRODUCTS	22
7.1 INSIGHTS INTO THE COPERNICUS COLLECTION-1	22
7.2 PRODUCT FORMAT	23
7.3 OFF-LINE PRODUCTS	23
7.4 REPROCESSED PRODUCTS	23

List of Figures

Figure 1: Correlation plot of SR retrieval by Sen2Cor over reference measurements on ground. ----- 6

Figure 2: Average SR retrieval performance per band estimated by comparison with ground measurements. B01 and B12 are shown with empty bars because they result from 4 campaign sample days only. There are no measurements from LaCrau and Gobabeb for B01 and B12. ----- 6

Figure 3: Correlation plots of Sen2Cor 2.10 (PBL 4.00) WV retrieval at 20 m resolution over WV reference from AERONET per climate zone on basis of a data set at 76 AERONET sites. The dashed line indicates $x=y$ and the solid lines show the limits of uncertainty goal $U(WV) \leq (0.1 * WV_{ref} + 0.2) \text{ g/cm}^2$ ----- 8

Figure 4: Correlation plot of Sen2Cor AOT₅₅₀ retrieval at 20 m resolution over AOT₅₅₀ reference from AERONET per climate zone on basis of a data set at 76 AERONET sites. Green triangles are AOT₅₅₀ retrieved with the DDV-algorithm and orange triangles are AOT₅₅₀ resulting from using CAMS data as fall-back solution. The dashed grey line indicates $x=y$ and the solid grey lines show the limits of uncertainty goal $U(AOT_{550}) \leq 0.1 * AOT_{550ref} + 0.03$. ----- 9

Figure 5: Spider plots of the omission and commission errors of clear pixels ----- 13

Figure 6: Spider plots of the omission and commission errors of thin cirrus pixels ----- 13

Figure 7: Spider plots of the omission and commission errors of cloud high probability pixels ----- 13

Figure 8: Aerosol Optical Depth at 550 nm; AERONET data (light red) and S2 CAMS data (red) Lille: Tile 31UES Sentinel-2 products between 25/01/2022 and 25/04/2023 ----- 15

Figure 9: Aerosol Optical Depth at 550 nm; scatter plot S2 CAMS data vs AERONET data 24 test sites: Sentinel-2 products between 25/01/2022 and 25/04/2023 ----- 16

Figure 10: Total Water Column [g.cm-2]; AERONET data (light blue) and S2 ECMWFT data (blue) Lille: Tile 31UES Sentinel-2 products between 25/01/2022 and 30/01/2023 ----- 17

Figure 11: Total Water Column [g.cm-2]; scatter plot S2 ECMWFT data vs AERONET data 24 test sites: Sentinel-2 products between 25/01/2022 and 25/04/2023 ----- 17

Figure 12 : Illustration of the very low negative reflectances near the edge of the swath observed on the L2A product: S2B_MSIL2A_20220329T105629_N0400_R094_T30SXJ_20220329T134242. ----- 21

List of Tables

Table 3-1: Summary of Sentinel-2 L2A products measured performances for mission key requirements. - 4


Table 3-2 : Test data selection: AERONET data (level ≥ 1.5) available within ± 15 min to overpass time.---- 7

Table 3-3: Selected test sites for Sen2Cor 2.10 validation ----- 10

Table 3-4: Summary of the cloud masking validation results for 4 study areas already analysed. True values are in columns and predicted values are in rows. ----- 10

Table 3-5: Summary of the cloud masking validation results for snow covered products. True values are in columns and predicted values are in rows.----- 12

Table 6-1: Anomaly and processing baseline summary.----- 20

	Optical MPC Data Quality Report – Sentinel-2 MSI L2A May 2023	Ref.: OMPC.CS.DQR.002.04-2023 Issue: 61.0 Date: 11/05/2023 Page: 1
---	--	---

1. Introduction

1.1 Scope of the Document

This document provides the status of Sentinel-2 mission Level 2A products data quality. It refers to systematic production from processing baselines 02.07 and higher and complements the Data Quality Report for L1C products.

Please note that the data quality status before the beginning of 2023 is covered by the [Annual Performance Report](#) of 2022. Please refer to this document as well as former Data Quality Reports (DQR) if needed.

It documents the measured product performances, the status of Level 2A processing chain, and the list of known anomalies on the production.


Additional performance metrics (in particular geometry) are reported in the companion Level 1C Data Quality Report. Similarly, anomalies affecting L1C products documented in that report also impact L2A products.

Note that a reference article provides an in-depth presentation of Sentinel-2 Calibration and Validation methods and results after one year in operation (F. Gascon *et al.*, "[Copernicus Sentinel-2 Calibration and Products Validation Status](#)", RSE, 2017). More information about L2A performance validation can be found in G. Doxani *et al.*, "[Atmospheric Correction Inter-Comparison Exercise](#)", Remote Sensing, 10 (352), pp 1-18. DOI: doi:10.3390/rs10020352 ISSN 2072-4292. Please note that a former version of Sen2Cor was used during this inter-comparison exercise and performance have generally improved since then. Detailed inter-comparison of cloud masking of Sen2Cor with other processors is published in S. Skakun *et al.*, "[Cloud Mask Intercomparison eXercise \(CMIX\): An evaluation of cloud masking algorithms for Landsat 8 and Sentinel-2](#)", Remote Sensing of Environment, Volume 274, 2022, 112990, ISSN 0034-4257¹.

1.2 Main points for this month

- ❖ New results covering the monitoring of the Aerosol Optical Depth (CAM5) and the Total Column of Water (ECMWF) auxiliary data embedded in L1C and L2A products (see section 4),
- ❖ Availability of the Copernicus Sentinel-2 Collection-1 data (see section 7.1).

¹ <https://doi.org/10.1016/j.rse.2022.112990>

	<p>Optical MPC</p> <p>Data Quality Report – Sentinel-2 MSI L2A</p> <p>May 2023</p>	<p>Ref.: OMPC.CS.DQR.002.04-2023</p> <p>Issue: 61.0</p> <p>Date: 11/05/2023</p> <p>Page: 2</p>
---	---	--

2. Processing Baseline Status

2.1 Processing baseline description

On December 6th, 2022, the **processing baseline 05.09** was deployed. The format of the L1C and L2A products within this new PB remains the same as outlined in the current Product Specification Document (version 14.9).

The operational processor deployed for this processing baseline (version 6.1) is the same used to generate the Copernicus Sentinel-2 Collection-1 (for more details please refer to the section 7.1). The particularity of the current processor is that it can operate with both the Copernicus DEM at 90 meters ground spatial resolution, and/or with its finer defined version at 30 meters resolution. Currently, the 90 m version of the DEM will continue being used for the nominal productions while the 30 m version of the DEM is being used for the historical archive reprocessing.

The Processing Baseline identifier 05.09 tags the operational products generated with the 90 m version of the Copernicus DEM. The Processing Baseline identifier 05.00 tags the Copernicus Sentinel-2 Collection-1 products.

At Level-2A, the following evolutions are included:

- ❖ Identification of defective pixels from missing instrument source packets in L2A Scene Classification layer.
- ❖ Correction of anomalies #5, #65, #66 and #74 (please refer to <https://s2anomalies.acri.fr/anomalies> for more details).

In addition to the evolutions included in the processing baseline 05.09, we remind here that a **radiometric offset** on reflectance digital numbers has been introduced with processing baseline 04.00 deployed on January 25th, 2022. Then, the dynamic range is shifted by a band-dependent constant: BOA_ADD_OFFSET. This offset allows encoding negative surface reflectances that may occur over very dark surfaces. **From the user’s point of view, the L2A Surface Reflectance (L2A_SR) shall be retrieved from the output radiometry as follows:**

- ❖ Digital Number DN=0 remains the “NO_DATA” value
- ❖ For a given DN in [1; 2¹⁵-1], the L2A BOA reflectance value is:

$$L2A_SR_i = (L2A_DNI_i + BOA_ADD_OFFSET_i) / QUANTIFICATION_VALUE_i$$

The radiometric offset value is reported in the field General_Info/Product_Image_Characteristics/BOA_ADD_OFFSET_VALUES_LIST/BOA_ADD_OFFSET of the User Product Metadata, as well as in the field Image_Data_Info/Radiometric_Info/BOA_ADD_OFFSET_VALUES_LIST/BOA_ADD_OFFSET of the Datastrip Metadata. It is set to -1000 Digital counts for all spectral bands.

For further information on the former processing baselines, please refer to <https://sentinels.copernicus.eu/web/sentinel/technical-guides/sentinel-2-msi/processing-baseline>.

2.2 Configuration and differences with Sen2cor ‘User’ version

The Level-2A operational processor generates, using algorithms of scene classification and atmospheric correction included in Sen2Cor processor, Level-2A (Surface Reflectance) products from Level-1C products. Level-2A can also be generated by the User from the Level-1C product using the standalone version of the Sen2Cor processor: <https://step.esa.int/main/snap-supported-plugins/sen2cor/>.

Sen2cor configuration applied for the Level-2A operational products:

- ❖ has Terrain correction activated,
- ❖ uses CCI AUX data to support scene classification.

Since Baseline 02.11, individual configuration parameters are set as follows and are the same default parameters provided with Sen2cor standalone version:

Log_Level	INFO
DEM	Copernicus DEM at 90 m since baseline03.00 Planet-DEM 90 m for previous baselines
Generate_DEM_Output	FALSE
Generate_TCI_Output	TRUE
Generate_DDV_Output	FALSE
Downsample_20_to_60	TRUE
Aerosol_Type	RURAL
Mid_Latitude	SUMMER
Ozone_Content	get the best approximation from metadata
WV_Correction	1: only 940 nm bands
VIS_Update_Mode	1: variable visibility
WV_Watermask	1: land-average
Cirrus_Correction	FALSE
DEM_Terrain_Correction	TRUE
BRDF_Correction	0: no BRDF correction
Adj_Km	1.000
Visibility km	40.0
Smooth_WV_Map	100.0
WV_Threshold_Cirrus	0.25

Some differences can be found between L2A products generated by users with current Sen2cor version and the operational products generated using the baseline 02.11:

- ❖ If the Digital Elevation Model (DEM) is different, this can impact terrain correction results (users have access to SRTM-DEM and Copernicus DEM at 90 m and 30 m whereas L2A operational products uses Planet-DEM for baseline ≥ 02.11 and Copernicus DEM at 90 m for baseline ≥ 03.00),
- ❖ The JP2000 compression library is different, which leads to a slightly different size of the products and a different compression noise.

3. Measured Product Performances

3.1 Performances Overview


The following overview table provides a summary of the Level 2A products data quality performances. Note that the cloud masking performance and performances for water vapour and aerosol optical thickness reported in this issue of the L2A Data Quality Report have been assessed with Sen2cor versions 2.10 (operational processing, PBL 4.00), and may thus slightly differ from the performance of the current processing baseline. Surface reflectance performance is based on Sen2Cor 2.8.

Table 3-1: Summary of Sentinel-2 L2A products measured performances for mission key requirements.

Requirement on	Description	Measured performance
Surface reflectance	Uncertainty goal of Bottom-of-Atmosphere reflectance retrieval: $U(\rho) \leq 0.05\rho_{\text{reference}} + 0.005$	79% of retrieved SR values are within uncertainty goal
Water Vapour	Uncertainty goal of WV retrieval: $U(WV) \leq (0.1*WV_{\text{ref}}+0.2) \text{ g/cm}^2$	96% of retrieved Water vapour values are within uncertainty goal
Aerosol Optical Thickness at 550 nm	Uncertainty goal of AOT550 retrieval: $U(AOT) \leq 0.1*AOT_{\text{ref}}+0.03$	48% (57%) of Aerosol optical thickness values at 550 nm retrieved with DDV algorithm (with CAMS data as fallback solution) are within uncertainty goal
Classification / Cloud masking	No requirement defined.	Commission of clear pixels ranges from 0% to 8% depending on test site with the higher values mostly due to confusion with transparent clouds. It is 45% for snow covered winter-season products. Balanced overall accuracies of clear vs cloud pixels range between 92 – 100% and is 77% for snow covered winter-season products

Measured performances are detailed in the following sections.

Starting with Processing Baseline 04.00, Sentinel-2 L2A products are compliant with the CEOS-ARD requirements at the threshold level (see <https://ceos.org/ard/>).

	Optical MPC Data Quality Report – Sentinel-2 MSI L2A May 2023	Ref.: OMPC.CS.DQR.002.04-2023 Issue: 61.0 Date: 11/05/2023 Page: 5
---	--	---

3.2 Performances

3.2.1 Surface reflectance radiometry

New quantitative assessment of surface reflectance radiometric retrieval for Sen2Cor 2.8 was done relative to a limited number of surface reflectance reference measurements [B. Pflug, J. Louis, R. de los Reyes, K. Pflug, U. Mueller-Wilm, C. Quang, R.I. Iannone, and P. Reinartz. "[Evaluation of SEN2COR Surface Reflectance Products over land surface with reference measurements on Ground](#)," in 2022 IEEE International Geoscience and Remote Sensing Symposium, (IEEE International Symposium on Geoscience and Remote Sensing IGARSS, 2022, pp.]. Measurements at RadCalNet sites LaCrau and Gobabeb were provided by CNES and RadCalNet-teams and measurements over test sites in Germany were provided by DLR.

The data set used contains 40 sample days from October 2017 to May 2018 for RadCalNet site Gobabeb, 21 sample days from January to September 2018 for RadCalNet site LaCrau, and 4 sample days from May 2018 to October 2021 for different locations in North-Eastern Germany. Reference measurements from RadCalNet sites Gobabeb and LaCrau are reused from Atmospheric Correction Intercomparison eXercise ACIX-2 (G. Doxani *et al.*, "[Atmospheric Correction Inter-Comparison Exercise](#)", Remote Sensing, 10 (352), pp 1-18. DOI: doi:10.3390/rs10020352 ISSN 2072-4292). They were provided by CNES for Sentinel-2 bands B02 to B11 in the same angular conditions as Sentinel-2A & 2B observations over the sites.

The site Gobabeb is located in Namibia in a desert environment without vegetation. The site LaCrau is located in the south of France and has sparse vegetation cover. The test areas in Germany represent flat terrain containing meadows and soil in a vegetated environment. Note that this data set is still too small for providing statistically reliable information. It will be extended with availability of new reference measurements.

The quantitative assessment of surface reflectance radiometric performance is provided for Sen2Cor version 2.80 'user' processing with CAMS fall back.

The correlation plot of SR retrieval by Sen2Cor over reference measurements on ground (Figure 1) shows good performance of Sen2Cor SR retrieval for the investigated data set. Results look similar to equivalent plots in the literature. The total uncertainty of SR retrieval with Sen2Cor over all sites is about 0.02 respectively 9% and nearly 80% of SR retrievals are compliant with uncertainty goal $\Delta SR \leq 0.05 * SR_{ref} + 0.005$. Systematic uncertainty $U_{sys}(SR) = (0.02 \pm 0.007) * SR + (0.0 \pm 0.002)$ is well within the uncertainty goal. Figure 2 gives deeper insight into SR retrieval performance by looking to average systematic uncertainties per band. Whereas random uncertainty is little increasing with band number respectively with SR values, we can observe much higher systematic uncertainty for B05 and B11. The origin for that is still not cleared. Current interpretation is that it may be caused by WV absorption which is present in both bands.

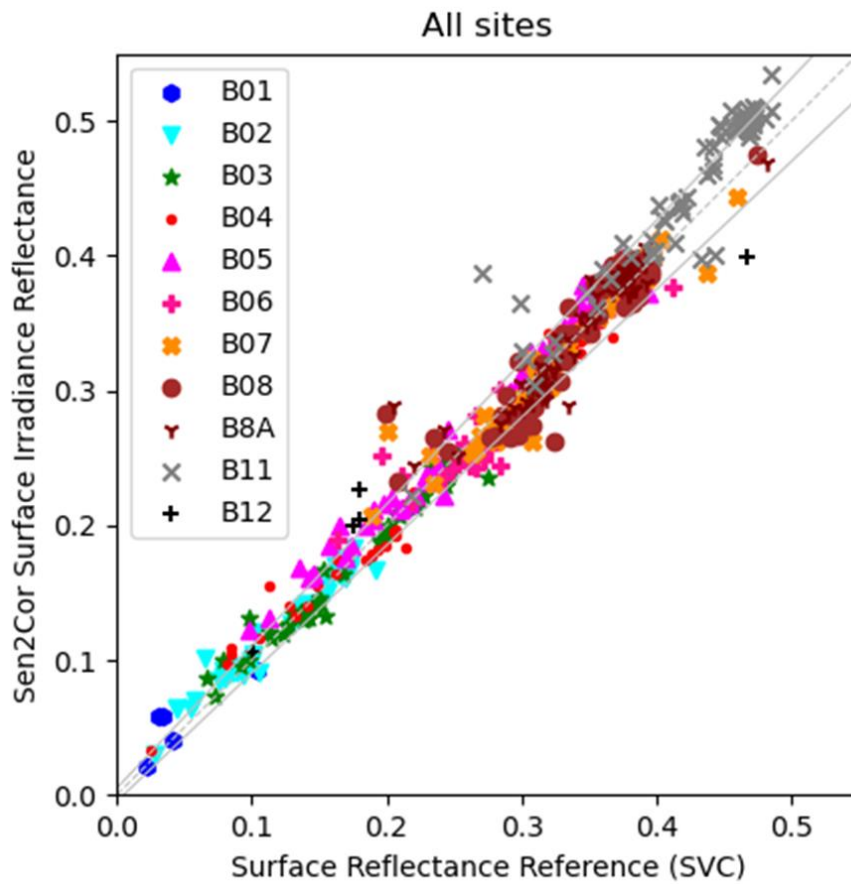


Figure 1: Correlation plot of SR retrieval by Sen2Cor over reference measurements on ground.

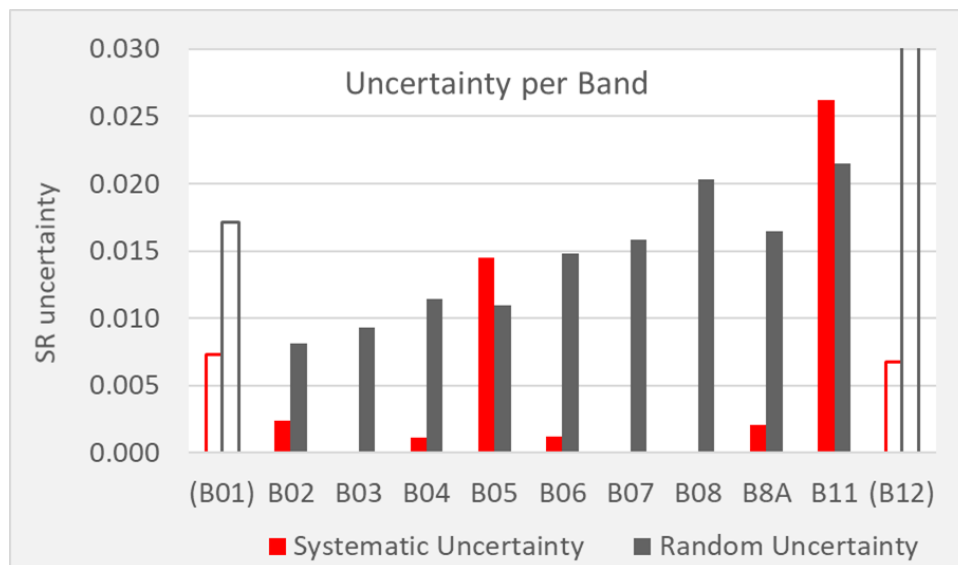


Figure 2: Average SR retrieval performance per band estimated by comparison with ground measurements. B01 and B12 are shown with empty bars because they result from 4 campaign sample days only. There are no measurements from LaCrau and Gobabeb for B01 and B12.


3.2.2 Water Vapour accuracy

Quantitative assessment of water vapour retrieval uncertainty is determined by direct comparison of Sen2Cor output averaged over 9 km x 9 km region of interest around Sun photometer location with ±15 min time average reference value from AERONET Sun photometer.

The analysis is based on a large dataset of 1989 match-ups in year 2022 at 76 AERONET locations distributed over all continents and all climate zones.

Table 3-2 : Test data selection: AERONET data (level ≥ 1.5) available within ±15 min to overpass time. Number of tiles used for analysis per continent. Data selection oriented on data use (1/3 weight) and area of continent (2/3 weight).

climate zone	N-America	S- America	Europe	Africa	Asia	Australia	No. of Sites	No. of Tiles
Polar	72		154				7	226
Temperate	159		242				14	401
Midlatitude N	248		191	45	213		21	697
Subtropical N	85			101	116		13	302
Tropical		78		78	39	19	13	214
Subtropical S		9		61		11	5	81
Midlatitude S		23		0		34	4	57
Aural		11					1	11
number of Tiles	564	121	587	285	368	64	76	1989
percentage of Tiles	28%	6%	30%	14%	19%	3%		
2/3 area + 1/3 access	18%	9%	30%	15%	23%	5%		
data access	17%	0.4%	76%	0.1%	4%	3%		
area fraction	18%	13%	8%	22%	33%	6%		



The correlation plots of WV retrieval by Sen2Cor 2.10 (PBL 4.00) over AERONET reference are shown in Figure 3.

Water vapour retrieval is very accurate up to really high WV content with 96% of retrievals within the uncertainty goal. Average WV retrieval uncertainty is 0.23 g/cm². Validation shows a trend for little underestimation of WV by Sen2Cor confirmed by systematic part of the uncertainty:

$$U_{\text{sys}}(\text{WV}) = (-0.08 \pm 0.003) * \text{WV} + (0.01 \pm 0.006)$$

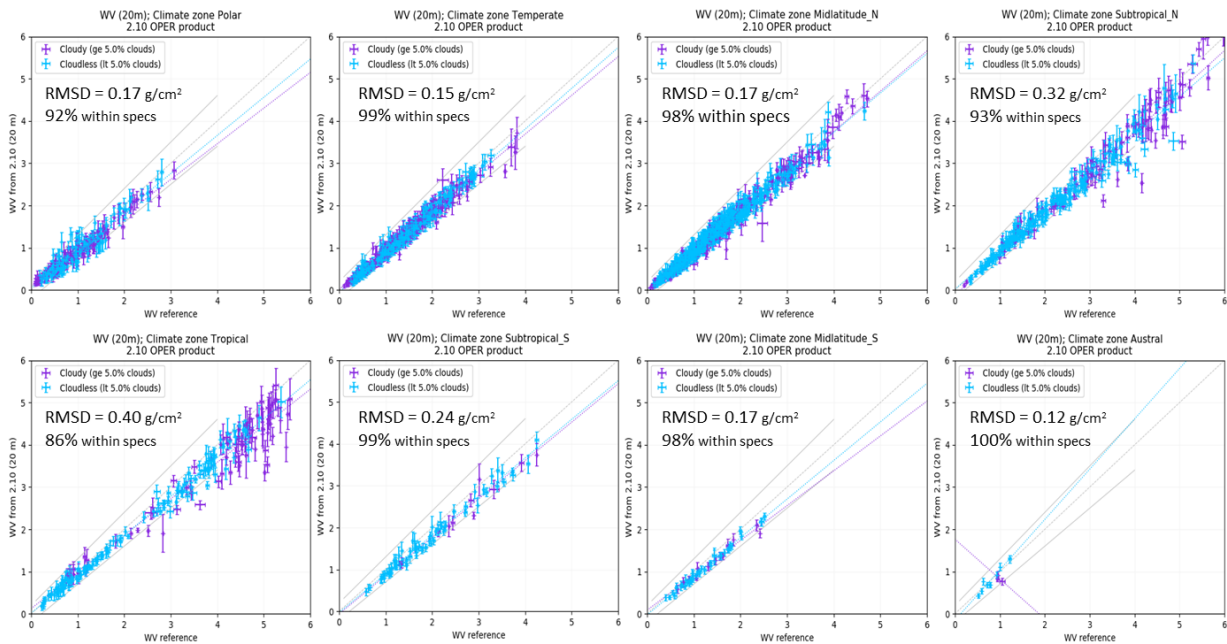


Figure 3: Correlation plots of Sen2Cor 2.10 (PBL 4.00) WV retrieval at 20 m resolution over WV reference from AERONET per climate zone on basis of a data set at 76 AERONET sites. The dashed line indicates $x=y$ and the solid lines show the limits of uncertainty goal $U(WV) \leq (0.1 * WV_{ref} + 0.2) \text{ g/cm}^2$

3.2.3 Aerosol Optical Thickness

Quantitative assessment of aerosol optical thickness retrieval uncertainty is determined by direct comparison of Sen2Cor output averaged over 9kmx9km region of interest around Sun photometer with ± 15 min time average reference value from AERONET Sun photometer. The analysis is based on a large dataset of 1989 match-ups in year 2022 at 76 AERONET locations distributed over all continents (see Figure 3 for more details).

The correlation plots of AOT retrieval by Sen2Cor 2.10 (PBL 4.00) over AERONET reference are shown in Figure 4. The data were processed with DDV algorithm respectively using AOT from the Copernicus Atmosphere Monitoring Service (CAMS) as fall back-solution for AOT-retrieval when there are less than 2% Dense Dark Vegetation (DDV) pixels in the image.

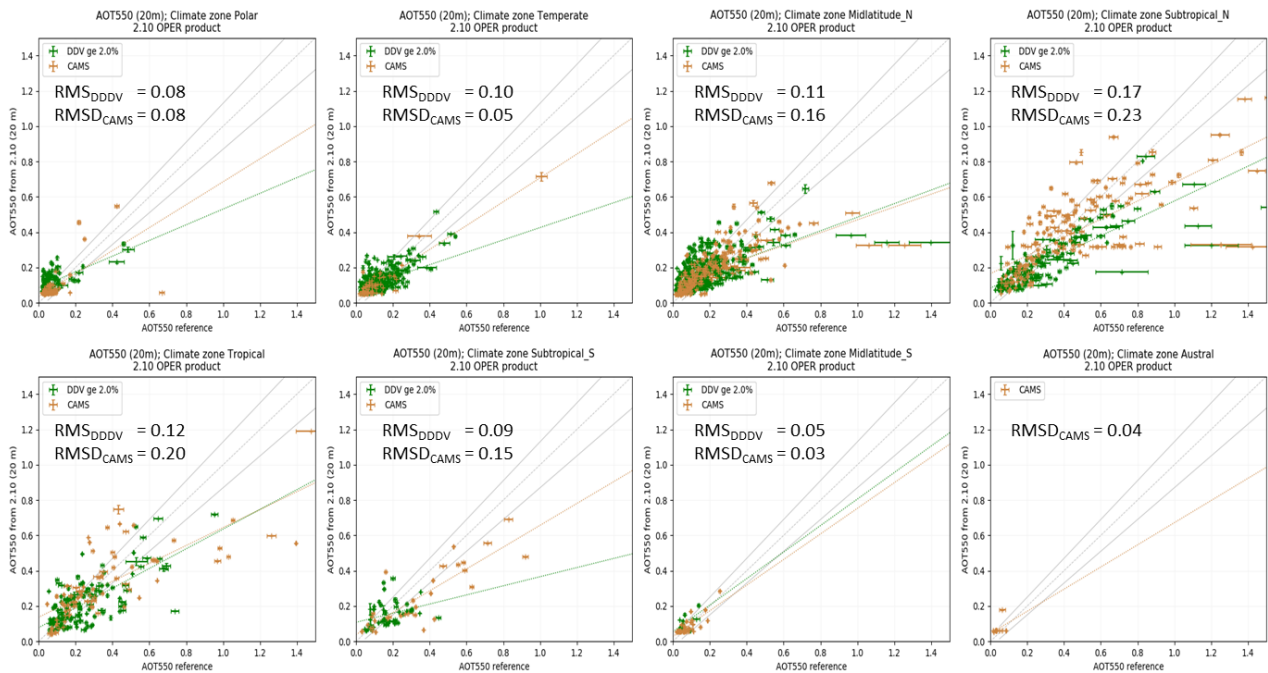


Figure 4: Correlation plot of Sen2Cor AOT₅₅₀ retrieval at 20 m resolution over AOT₅₅₀ reference from AERONET per climate zone on basis of a data set at 76 AERONET sites. Green triangles are AOT₅₅₀ retrieved with the DDV-algorithm and orange triangles are AOT₅₅₀ resulting from using CAMS data as fall-back solution. The dashed grey line indicates $x=y$ and the solid grey lines show the limits of uncertainty goal $U(AOT_{550}) \leq 0.1 * AOT_{550ref} + 0.03$.

The AOT-retrieval algorithm implemented in Sen2Cor requires DDV-pixels in the image. If there are not enough DDV-pixels present, then the auxiliary CAMS files embedded in the L2A products are used as fall-back solution. Therefore, aerosol optical thickness retrieval results are analysed separately for the DDV algorithm and the CAMS-fall-back solution. The DDV algorithm gives 25% to 63% of values within uncertainty goal dependent on climate zone (average 48%) with average total uncertainty of 0.11. Validation shows a trend for underestimation of higher AOT by DDV algorithm implemented in Sen2Cor confirmed by systematic part of the uncertainty $U_{sys}^{DDV}(AOT) = (-0.54 \pm 0.01) * AOT + (0.08 \pm 0.003)$. CAMS fall-back solution mostly is activated in arid, non-vegetated regions or during winter time. It gives 34% to 80% of values within uncertainty goal dependent on climate zone (average 57%), however with larger average uncertainty of 0.16. This larger uncertainty results at least partly from the higher AOT-values present in situations when CAMS data are used. Systematic uncertainty $U_{sys}^{CAMS}(AOT) = (-0.42 \pm 0.01) * AOT + (0.08 \pm 0.005)$ again shows a trend for AOT underestimation relative to AERONET at higher AOT values.

3.2.4 Classification accuracy

Classification performance is evaluated by comparison of the Sen2Cor outputs with reference samples. The reference samples were labelled visually based on the RGB and false-RGB composites, cirrus band layer, and the spectral profiles.

Current analysis of classification accuracy for Sen2Cor 2.10 SCL products were evaluated on a set of 10 Sentinel-2 L2A scenes at 4 test sites (Table 3-3) for non-snow covered products and on a set of 4 Sentinel-2 L2A scenes for test site Yakutsk with snow coverage. Results for snow covered products are reported separately.

Table 3-3: Selected test sites for Sen2Cor 2.10 validation

Site	Tile	Date	Cloud cover (%)	No data pixels (%)
Potsdam (Germany)	T33UUU	22-03-2022	6.07	0.00
		04.08.2022	18.58	0.00
Rimrock (USA)	T11TMM	24-04-2022	7.27	1.79
		16-09-2022	28.12	2.00
Murcia (Spain)	T30SXH	15-05-2022	24.01	0.00
		07-10-2022	11.00	0.00
Bandung (Indonesia)	T48MZT	10-06-2022	26.48	6.48
		22-11-2022	96	0.86
Yakutsk (Russia)	T52VEP	10-02-2022	12.76	0.00
		28-07-2022	12.84	0.00

Validation sites are distributed over several continents, covering different climate zones, and including various seasons, and environments.

Table 3-4: Summary of the cloud masking validation results for 4 study areas already analysed. True values are in columns and predicted values are in rows.

Potsdam (T33UUU)

	Clear	Cloud	sum	UA	CE	OA
Clear	76 %	2%	78%	97%	3%	91%
Cloud	7%	15%	22%	69%	31%	
sum	82%	18%	100%			
PA	92%	87%				Balanced OA
OE	8.4%	12.6%				94%

Rimrock (T11TMM)

	Clear	Cloud	sum	UA	CE	OA
Clear	52 %	1%	54%	97%	3%	92%
Cloud	6%	40%	46%	87%	13%	
sum	58%	42%	100%			
PA	90%	96%				Balanced OA
OE	10.3%	3.5%				93%

Murcia (T30SXH)

	Clear	Cloud	sum	UA	CE	OA
Clear	52 %	5%	56%	92%	8%	90%
Cloud	5%	39%	44%	89%	11%	
sum	56%	44%	100%			
PA	91%	89%				Balanced OA
OE	8.5%	10.8%				92%

Bandung (T48MZT)

	Clear	Cloud	sum	UA	CE	OA
Clear	42 %	0%	42%	100%	0%	92%
Cloud	8%	50%	58%	87%	13%	
sum	50%	50%	100%			
PA	85%	100%				Balanced OA
OE	15.4%	0.2%				92%

Yakutsk (T52VEP, summer – no snow cover)

	Clear	Cloud	sum	UA	CE	OA
Clear	75 %	0%	75%	100%	0%	100%
Cloud	0%	25%	25%	99%	1%	
sum	75%	25%	100%			
PA	100%	99%				Balanced OA
OE	0.2%	0.7%				100%

The accuracy assessment for cloud masking per test site is presented in Table 3-4 for products without snow cover. Sen2Cor classes cloud medium probability, cloud high probability and thin cirrus are aggregated to clouds, whereas Sen2Cor classes water, vegetated, non-vegetated and snow are aggregated to clear pixels. Commission and omission errors correspond to user’s (UA) and producer’s (PA) accuracies respectively. Balanced overall accuracy (OA) is the average of omission (OE) and commission (CE) errors. Results show good cloud masking performance with balanced overall accuracies of clear vs cloud pixels ranging between 92-100%. In terms of commission errors of the clear pixel the range is between 0-8% with the lower values at sites Bandung and Yakutsk and the higher for Murcia which show also a 11% omission of clouds.

Table 3-5: Summary of the cloud masking validation results for snow covered products. True values are in columns and predicted values are in rows.

Yakutsk (T52VEP, winter – with snow cover)

	Clear	Cloud	sum	UA	CE	OA
Clear	45 %	36%	81%	55%	45%	63%
Cloud	1%	18%	19%	95%	5%	
sum	46%	54%	100%			
PA	98%	33%				Balanced OA
OE	1.9%	66.8%				77%

The accuracy assessment for cloud masking on snow covered products (so far only test site Yakutsk) is presented in Table 3-5. Results show worse cloud masking performance compared to products without snow cover, with balanced overall accuracy of clear vs cloud pixels of 77%. Commission errors of the clear pixel is 45%. It is important to consider that labelling the snow-covered product is more challenging than products without snow cover, which leads to higher uncertainties in the labelled masking references. There are more (longer) shadows in winter due to the low sun elevation, which are difficult to recognize over bright snow surface.

Figure 5 to Figure 7 show the misclassification of the clear, thin cirrus, and cloud high probability pixels in more details in the form of spider plots. Figure 5 shows the misclassification of omitted clear pixels and the real classes of the committed clear pixels. In Bandung scenes, there are 17% clear pixels misclassified as thin cirrus. In Yakutsk winter scene, there are 16% of cloud shadow and 20% thin cirrus pixels misclassified as clear pixels. Figure 6 shows the misclassification of omitted thin cirrus pixels and the real classes of the committed thin cirrus pixels. In Yakutsk winter scene, there are 20% omitted thin cirrus pixels misclassified as snow pixels. Figure 7 shows the misclassification of omitted cloud high probability pixels and the real classes of the committed cloud high probability pixels. Both the omission and commission errors of cloud high probability pixels are relatively low. This shows that misclassification between thin cirrus and clear pixels often occurs in scenes from tropical climate such as Bandung, and in scenes with snow covers, cloud high probability pixels are correctly classified but thin cirrus and cloud shadow pixels are often misclassified as clear pixels.

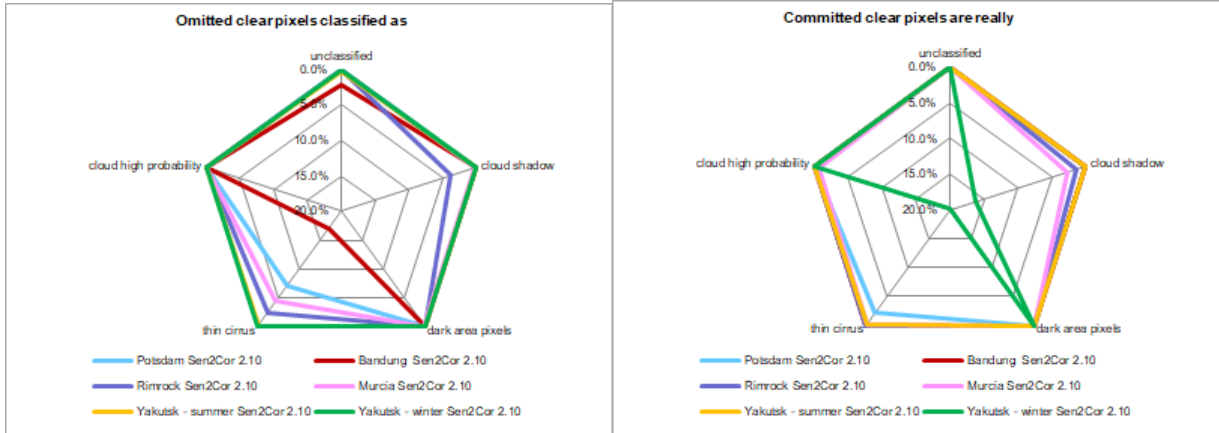


Figure 5: Spider plots of the omission and commission errors of clear pixels

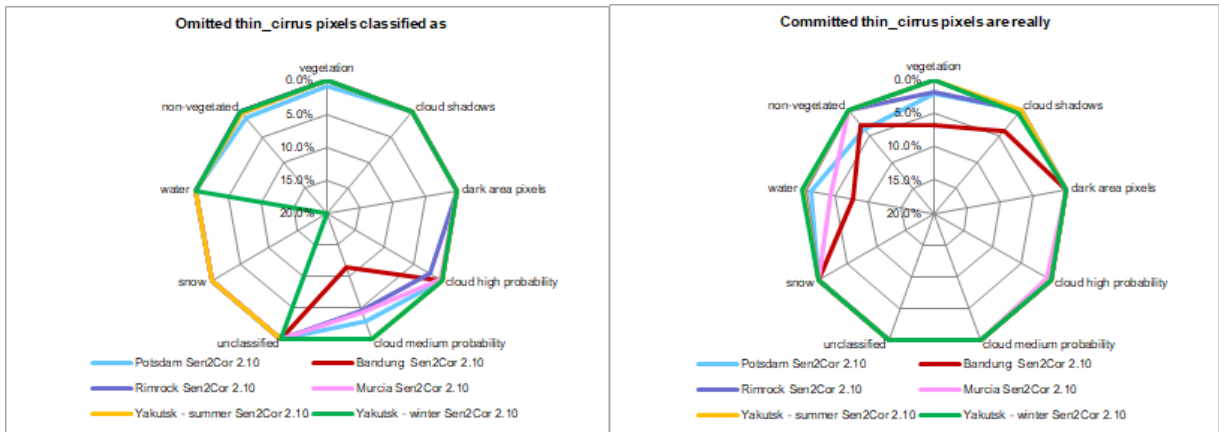


Figure 6: Spider plots of the omission and commission errors of thin cirrus pixels

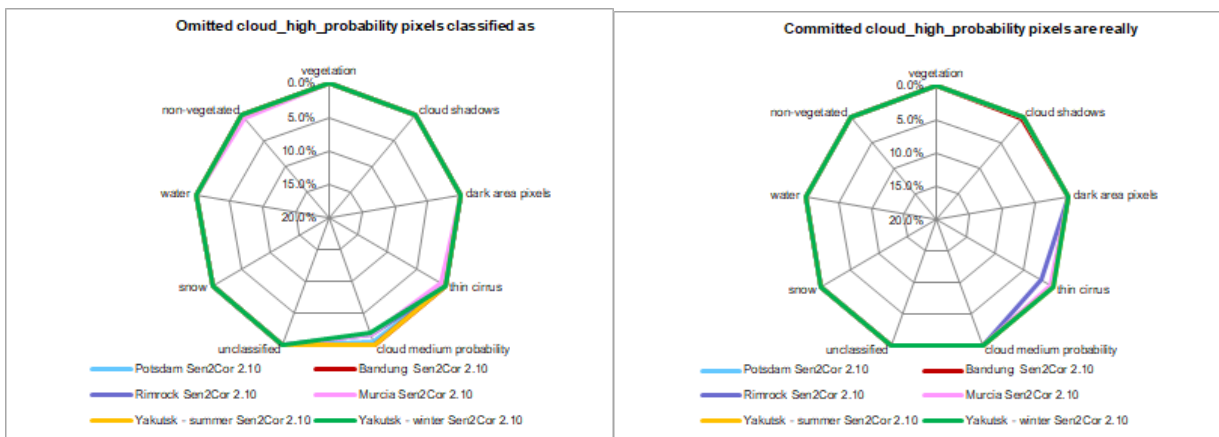



Figure 7: Spider plots of the omission and commission errors of cloud high probability pixels

	<p>Optical MPC</p> <p>Data Quality Report – Sentinel-2 MSI L2A</p> <p>May 2023</p>	<p>Ref.: OMPC.CS.DQR.002.04-2023</p> <p>Issue: 61.0</p> <p>Date: 11/05/2023</p> <p>Page: 14</p>
---	---	---

4. Auxiliary Data Monitoring

This section reports on the monitoring of two auxiliary data parameters provided in L1C and L2A products in the granule AUX_DATA folder, respectively in the files AUX_CAMS_FO and AUX_ECMWFT:

- ❖ Aerosol Optical Depth at 550 nm (in AUX_CAMS_FO),
- ❖ Total Column of Water (in AUX_ECMWFT).

The parameters in AUX_CAMS_FO originate from ECMWF through the Copernicus Atmosphere Monitoring Service (CAMS) that generates every day, five-day forecasts of aerosols, atmospheric pollutants, greenhouse gases, stratospheric ozone, and the UV-Index.

The Aerosol Optical Depth at 550 nm from AUX_CAMS_FO can be used as atmospheric information fallback in the L2A processor when performing the atmospheric correction for certain Sentinel-2 tiles when not enough dark dense vegetation pixels are present to perform an independent aerosol retrieval (see 3.2.3).

The parameters in AUX_ECMWFT originate from ECMWF that generates every day global meteorological forecasts.

The Total Column of Water from AUX_ECMWFT is not used in the L2A processor when performing the atmospheric correction. However, it is interesting to check how its performance compares with the L2A processor outputs (see 3.2.2).

4.1 Material and methods

The monitoring is performed on 24 different locations distributed over all continents and all climate zones using 24 AERONET stations.

We would like to express our gratitude to the Principle Investigator(s) and Co-Investigator(s) as well as all the persons involved for establishing and maintaining the 24 sites used in this analysis: 'Lille', 'Kyiv', 'Kangerlussuaq', 'NEON_UNDE', 'Toravere', 'MetObs_Lindenberg', 'NEON_CVALLA', 'Medenine-IRA', 'Valladolid', 'XiangHe', 'OHP_OBSERVATOIRE', 'Gangneung_WNU', 'NEON-Disney', 'Tamanrasset_INM', 'Kanpur', 'Dhaka_University', 'Ilorin', 'Silpakorn_Univ', 'Huancayo-IGP', 'Jambi', 'Rio_Branco', 'Mongu_Inn', 'Fowlers_Gap', 'CEILAP-RG'.

The data period covers about 15 months of data, between 25/01/2022 to 25/04/2023, starting with Sentinel-2 PB 04.00, since the AUX_CAMS_FO files are embedded in the L1C and L2A products.

The values of AUX_CAMS_FO and AUX_ECMWFT are extracted at the AERONET site location using its geographic coordinates.

The Aerosol Optical Depth at 550 nm AERONET values are spectrally and temporally interpolated to the Sentinel-2 acquisition time. The Precipitable Water AERONET values are temporally interpolated to the Sentinel-2 acquisition time.

4.2 Aerosol Optical Depth at 550 nm

Figure 8 presents a temporal plot of all the concomitant Sentinel-2 auxiliary CAMS data (in red) with the AERONET data (in light red), for one AERONET site: Lille, France.

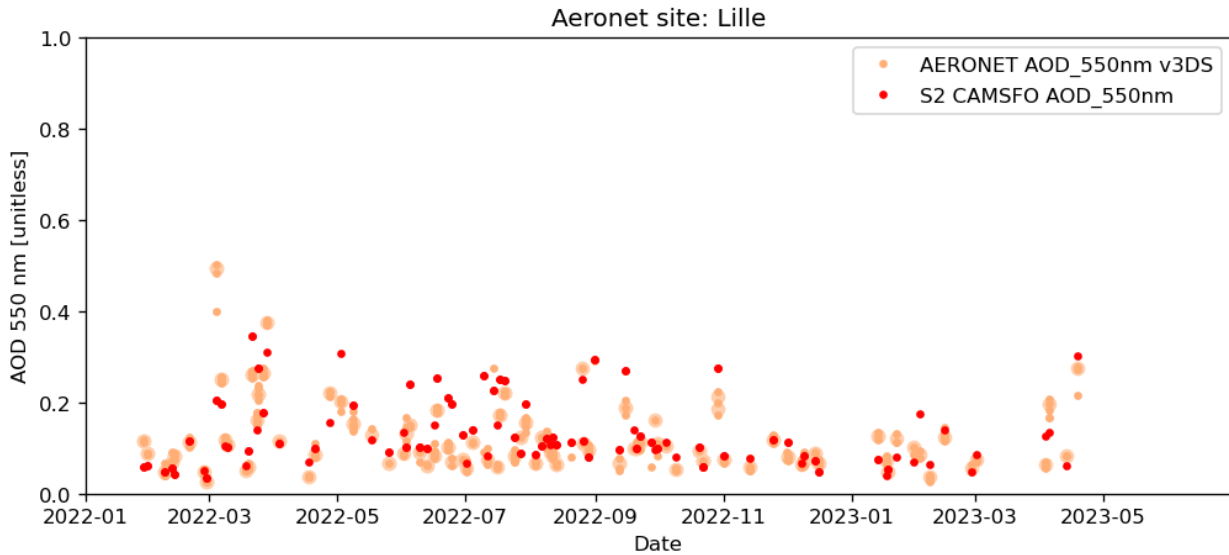
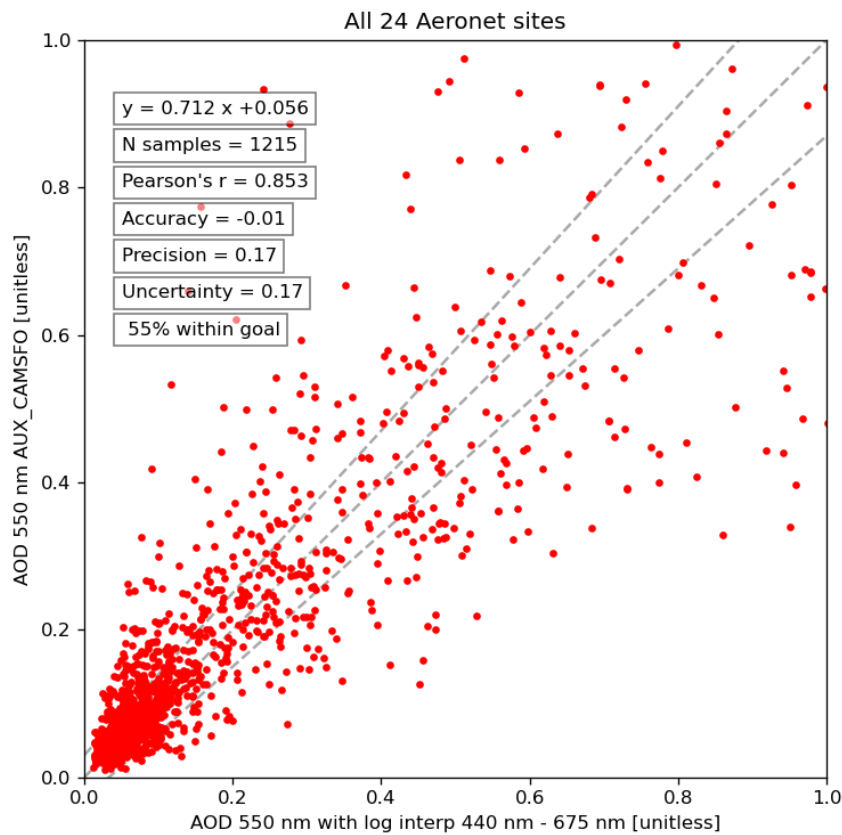


Figure 8: Aerosol Optical Depth at 550 nm; AERONET data (light red) and S2 CAMS data (red)
Lille: Tile 31UES Sentinel-2 products between 25/01/2022 and 25/04/2023

Figure 9 presents a scatter plot of all the concomitant Sentinel-2 auxiliary CAMS data with respect to the AERONET data for all the 24 AERONET test sites.

These consolidated statistics on all test sites show that 55% of CAMS data is within the uncertainty goal with an overall uncertainty of 0.17 without significant bias. It should be noted however that depending on the test site this value can range from 23% for the lowest agreement (Ilorin) up to 84% for the best agreement (Kangerlussuaq). In general, the agreement is better for test sites with lower aerosol load.



**Figure 9: Aerosol Optical Depth at 550 nm; scatter plot S2 CAMS data vs AERONET data
24 test sites: Sentinel-2 products between 25/01/2022 and 25/04/2023**

4.3 Total Column of Water

Figure 10 presents a temporal plot of all the concomitant Sentinel-2 auxiliary ECMWF data (in blue) with the AERONET data (in light blue), for one AERONET site: Lille, France. A seasonality can be observed with an atmosphere wetter in summer and drier in winter.

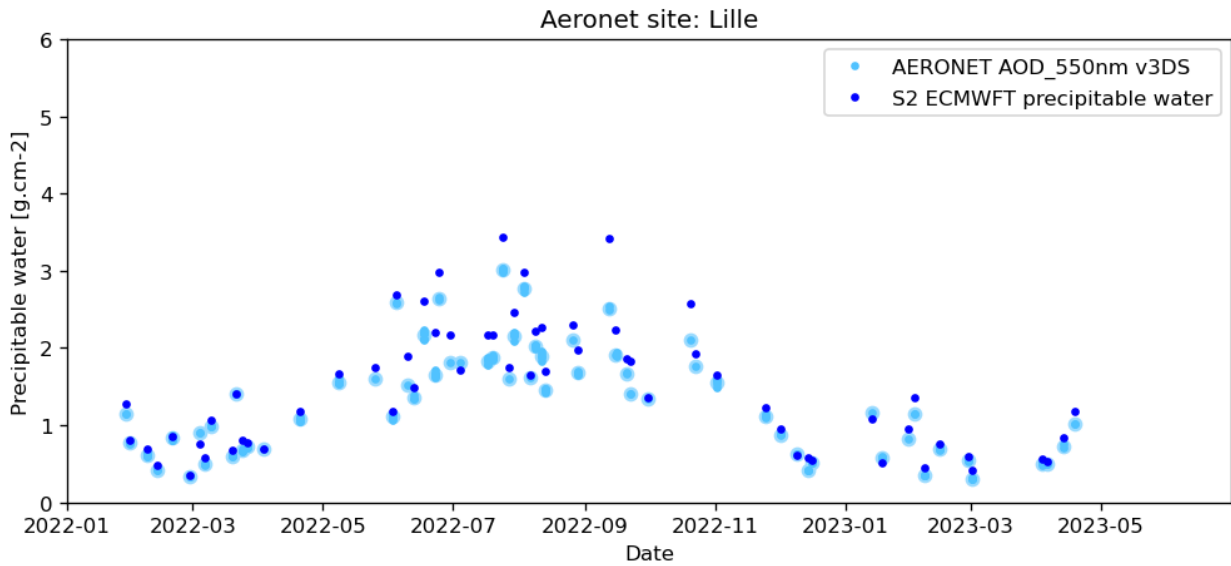


Figure 10: Total Water Column [g.cm-2]; AERONET data (light blue) and S2 ECMWFT data (blue)
Lille: Tile 31UES Sentinel-2 products between 25/01/2022 and 30/01/2023

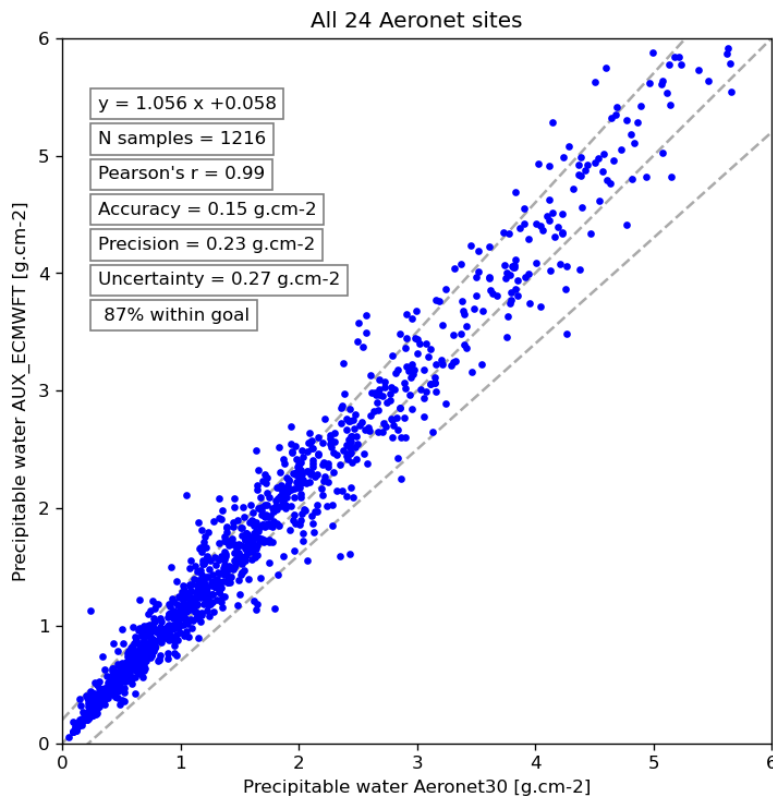


Figure 11: Total Water Column [g.cm-2]; scatter plot S2 ECMWFT data vs AERONET data
24 test sites: Sentinel-2 products between 25/01/2022 and 25/04/2023



	<p>Optical MPC</p> <p>Data Quality Report – Sentinel-2 MSI L2A</p> <p>May 2023</p>	<p>Ref.: OMPC.CS.DQR.002.04-2023</p> <p>Issue: 61.0</p> <p>Date: 11/05/2023</p> <p>Page: 18</p>
---	---	---

Figure 11 presents a scatter plot of all the concomitant Sentinel-2 auxiliary ECMWF data with respect to the AERONET data for all the 24 AERONET test sites.

These consolidated statistics on all test sites show that 87% of ECMWF data is within the uncertainty goal with an overall uncertainty of 0.27 g.cm^{-2} with a slight positive bias of 0.15 g.cm^{-2} . It should be noted however that depending on the test site, this value can range from 75% for the lowest agreement (OHP_OBSERVATOIRE) up to 98% for the best agreement (Kangerlussuaq). In general, the agreement is better for test sites with dryer atmosphere.

 <p>OPT-MPC Copernicus Sentinel Optical Mission Performance Cluster</p>	<p>Optical MPC</p> <p>Data Quality Report – Sentinel-2 MSI L2A</p> <p>May 2023</p>	<p>Ref.: OMPC.CS.DQR.002.04-2023</p> <p>Issue: 61.0</p> <p>Date: 11/05/2023</p> <p>Page: 19</p>
---	---	---

5. Product features

Some known product features are visible on Sentinel 2 Level-2A products.

These features are generated by:

- ❖ the current scene classification algorithm which has some known limitations,
- ❖ the overlap area between adjacent tiles,
- ❖ terrain over-correction on shaded areas due to inaccuracies of the Digital Elevation Model,
- ❖ products with a Sun-Zenith Angle (SZA) higher than 70°,
- ❖ corrupted pixels affected by missing or degraded instrument source packets,
- ❖ discontinuities visible in Terrain Correction on very flat areas,
- ❖ artefacts at the edge of the swath due to L2A NoData mask.

Please refer to <https://sentinels.copernicus.eu/web/sentinel/technical-guides/sentinel-2-msi/data-quality-reports/product-features> for more details and examples of the known Sentinel 2 product features, as well as to the [Sentinel 2 Annual Performance Report](#) covering the year 2022.

6. Product anomalies

6.1 Introduction

This section describes the L2A product anomalies that occurred in 2023. Please refer to the APR 2022 or to the on-line Sentinel-2 anomaly database <https://s2anomalies.acri.fr/anomalies> to have the full list of anomalies.

Note that some L1C anomalies affect also the quality of L2A products. Whenever this is the case, any reprocessing to correct an anomaly will include level 2 products.

Each anomaly is tagged with a code “#N” allowing linking it to a given processing baseline through the three tables provided in the sub-sections below.

The following table provides the status of known L2A processing anomalies. Note that some L1C anomalies directly affect the quality of the L2A products.

Table 6-1: Anomaly and processing baseline summary.

Anomaly ID	Baseline number	05.09
	Deployment date	06/12/2022
	Anomaly title	
81	Very low negative reflectances near the edge of the swath	Some products

6.2 Very low negative reflectances near the edge of the swath (#81)

A new anomaly consisting in a dark area with very low negative reflectances near the edge of the swath was observed by the S2GM team on the product:

S2B_MSIL2A_20220329T105629_N0400_R094_T30SXJ_20220329T134242.

This anomaly is particularly visible on the B02 band. This radiometry “distortion” defect is not present in the L1C image. This defect is the result of an overcorrection of the adjacency correction algorithm for the case when the radiometry of the pixels near the swath border is noticeably different from the average radiometry of the scene. The blue bands are the spectral bands which are affected the most. An evolution is in preparation to improve the quality of the adjacency correction for the pixels near the swath border. Users are advised to pay particular attention to the swath border area for the cases mentioned above (very heterogeneous radiometry of the scene). The effect can be visible up to 1 km from the swath border. An evolution is in preparation to improve the quality of the adjacency correction for the pixels near the swath border for these particular cases.

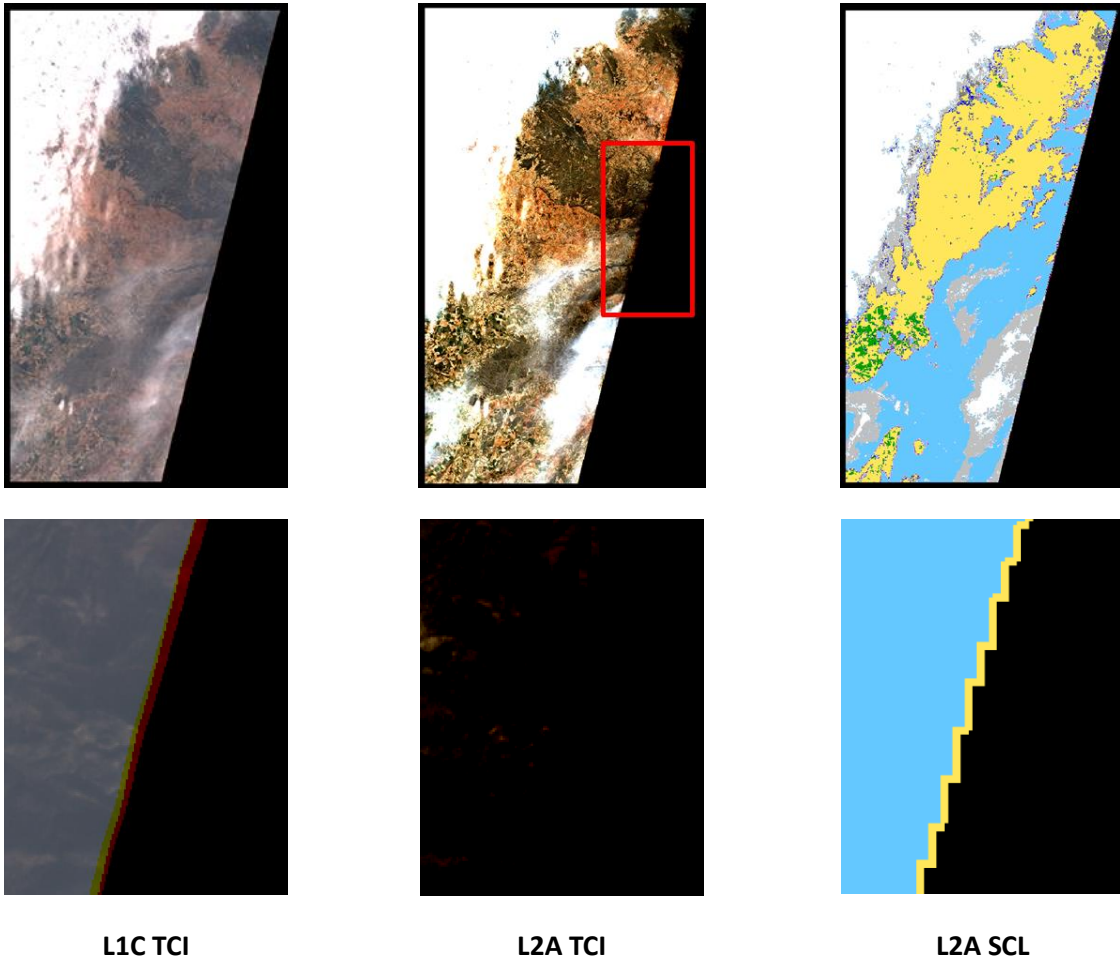



Figure 12 : Illustration of the very low negative reflectances near the edge of the swath observed on the L2A product: S2B_MSIL2A_20220329T105629_N0400_R094_T30SXJ_20220329T134242.
An illustration of the corresponding L1C product (first column) is also shown

	<p>Optical MPC</p> <p>Data Quality Report – Sentinel-2 MSI L2A</p> <p>May 2023</p>	<p>Ref.: OMPC.CS.DQR.002.04-2023</p> <p>Issue: 61.0</p> <p>Date: 11/05/2023</p> <p>Page: 22</p>
---	---	---

7. General information on products

7.1 Insights into the Copernicus Collection-1

The Collection-1 reprocessing will provide consistent Sentinel 2A and Sentinel 2B time series with a uniform processing baseline (PB 05.00) and optimized calibration.

The L2A surface reflectance product will be compliant with the CEOS Analysis Ready Data for Land (CARD4L) standard from 2015 to the present.

The improvements introduced in recent baselines will be generalized to the whole time series:

- ❖ Geometric refining using the high-quality Copernicus Digital Elevation Model (introduced in PB 03.00),
- ❖ Harmonized radiometry after alignment of S2B on S2A (introduced with PB 04.00),
- ❖ Most recent product format for L1C and L2A with radiometric offset, quality masks in raster format, L2A quality indicators, DOI (introduced in PB 04.00),
- ❖ Improved L2A processing algorithms for scene classification and surface reflectance (aligned with PB 04.00).


In addition, the PB 05.00 will provide some specific improvements over the current 04.00 baseline:

- ❖ Optimization of the applicability of successive radiometric and geometric calibrations,
- ❖ Reliable quality mask for radiometric saturation,
- ❖ Identification of defective pixels from missing instrument source packets in L2A Scene Classification layer,
- ❖ Use of the Copernicus Digital Elevation Model at 30 m resolution.

Collection-1 products are distributed via three different platforms:

- ❖ <https://creodias.eu>: the data catalogue is accessible at <https://finder.creodias.eu/>. To query only Collection-1 products, a filter on the sensing date (i.e. before January 2022 for Collection-1 products) and on the publication date can be used, as the dissemination of these products started in January 2023.
- ❖ <https://www.onda-dias.eu>: the data catalogue is accessible at <https://catalogue.onda-dias.eu/catalogue/>. To query only Collection-1 products (PB 05.00), you can write “*_N0500_*” in the research bar of the catalogue.
- ❖ <https://mundiwebservices.com>: L1C Collection-1 products can be found at [https://mundiwebservices.com/geodata/S2R MSI L1C](https://mundiwebservices.com/geodata/S2R_MSI_L1C), and L2A Collection-1 products at [https://mundiwebservices.com/geodata/S2R MSI L2A](https://mundiwebservices.com/geodata/S2R_MSI_L2A).

Collection-1 production has started with December 2021 products and goes in reverse chronological order of sensing time. In April 2023, Collection-1 products from April to December 2021 are available. Please note that the period reported is considered available for the most part, while gradually densifying in particular on the side of the earlier months of the period.

	Optical MPC Data Quality Report – Sentinel-2 MSI L2A May 2023	Ref.: OMPC.CS.DQR.002.04-2023 Issue: 61.0 Date: 11/05/2023 Page: 23
---	--	--

Additional information regarding the status and accessibility of Collection 1 reprocessed data can be found on: <https://sentinels.copernicus.eu/web/sentinel/technical-guides/sentinel-2-msi/copernicus-sentinel-2-collection-1-availability-status>.

7.2 Product Format

On December 6th 2016, a new naming convention has been introduced (Product Specification Document version 14). The new convention leads to shorter product paths with less redundancy of information. The product name now includes the acquisition date and a “product discriminator” which is related to the acquisition date but can be different in some instances.

A reformatting of the Data Hub product archive to the single-tile, short name format is currently in progress. The JP2000 images are not affected by the reformatting.

Note that the product footprint for all products generated before July 20th 2016 include areas of No Data, while for the later product the footprint outlines valid pixels only.

7.3 Off-line products

Beginning 23rd September 2019, Sentinel-2 products older than one year will not be available on-line in the Copernicus data hubs. Instead, they will be retrieved on demand from the Long-Term Archive (LTA). Products retrieved from the LTA will be different from the original ones delivered in Near Real Time production:

- ❖ The product discriminator (the second date in the product) will be different. However, the zip file provided with the delivery will keep the name of the original product.
- ❖ The product will be restored using the latest applicable format (currently compact, single tile format, PSD v14.2).
- ❖ The GENERATION_TIME field in the User Product metadata will also reflect the date of the retrieval from the LTA.

See <https://scihub.copernicus.eu/userguide/LongTermArchive> for more details.

7.4 Reprocessed products

Two situations can lead to a recovery reprocessing and update of the SciHub archive:

- ❖ Products affected by major anomalies tracked in the Sentinel-2 anomaly database
- ❖ Datastrips with missing L1C tiles. In this case the products are not tracked in the anomaly database.

In both cases, the original products are removed and replaced by products with a more recent generation time. However, in the latter case, the original products can still be considered as valid.

End of document